



Tear Drop Flushmount PBT White

Assembly and Installation Instructions

IMPORTANT SAFETY INSTRUCTIONS:

- These instructions are provided for your safety. It is important that they are read carefully and completely before installing fixture.
- **THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**
- We strongly recommend that a professional electrician install all direct wire fixtures.
- This fixture has been rated for up to **100-watt maximum E26 Type A** (not included) or **23-Watt compact fluorescent bulb** (not included). To avoid the risk of fire, do not exceed the recommended wattage.
- The lighting fixture is meant for indoor use, DRY LOCATIONS ONLY. It must be connected only to 3-wire, single-phase electrical supply systems (provided with Ground wire or equivalent protection system).
- Save these instructions.

Warning: this lighting fixture contains lead, a chemical known to the State of California to cause cancer, birth defects and other reproductive harm. Wash hands after installing, handling, cleaning or otherwise touching this light fixture,

WARNING:

- **To reduce the risk of fire, electrical shock or personal injury, always turn off the light fixture and allow it to cool prior to replacing the light bulb.**
 - **Do not touch the bulb when the fixture is turned on. Do not look directly at any lit bulb.**
 - **Keep flammable materials away from any lit bulb.**
- For your safety and convenience, assembly by two people is recommended.
 - Remove all parts and hardware from the box along with any plastic protective packaging. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

Parts Enclosed:

- (1) Mounting Plate (B)
- (2) Threaded Studs (C)
- (1) Green Ground Screw (D)
- (1) Canopy (E)
- (2) Cap Nuts (G)
- (1) Large Shade Ring (H)
- (1) Small Shade Ring (I)

Hardware Included:

- (3) Plastic Wire Connectors (A)
- (2) Mounting Screws (F)


Tools required for assembly:

- Phillips Screwdriver
- Electrical Tape
- Wire Cutters
- Wire Strippers

To Install:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER!
2. Carefully unpack all fixture parts and hardware and lay them out on a clear workspace.
3. Remove the old fixture.
4. Gently pull the wiring down from the ceiling junction box and allow it to hang.
5. Feed the wires of the new fixture through the center hole on the Mounting plate (B). Make sure that the two threaded studs of the mounting plate face down towards the fixture.
6. Carefully inspect the lighting fixture wires. The NEUTRAL FIXTURE WIRE is White. The HOT FIXTURE WIRE is Black and the bare copper wire is the GROUND WIRE.

7. Attach the GROUND WIRE from the fixture to the GROUND JUNCTION BOX WIRE from the outlet (usually green or bare wire). Fasten each together using the provided Plastic Wire Connector (A) and wrap the connection with electrical tape. Be sure that no wire strands are exposed. If your outlet box DOES NOT have a GROUND WIRE, insert the provided Green Ground Screw (D) into the Mounting Plate (B) facing DOWN towards the new fixture, wrap the fixture's bare ground wire once around the ground screw and then use a screwdriver to tighten the screw so that the wrapped ground wire is secured to Mounting Plate (B). IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED!
8. Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE using a provided Plastic Wire Connector (A) and then wrap the connection with electrical tape. Be sure that no wire strands are exposed.
9. Connect the HOT WIRE to the HOT JUNCTION BOX WIRE using a provided Plastic Wire Connector (A) and then wrap the connection with electrical tape. Be sure that no wire strands are exposed. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
10. Gently tuck the wire connections neatly into the ceiling junction box.
11. Secure the Mounting Plate (B) to the ceiling junction box using provided Screws (F) and an appropriate screwdriver. Again, make sure that the Threaded Studs (C) face down towards the floor. Tighten Screws (F) until Mounting Plate (B) is firmly secured to the junction box.
12. Position Canopy (E) up over the Mounting Plate (B) so that the holes located in the Canopy align with and receive Threaded Studs (C). Secure a provided Cap Nut (G) onto the protruding threaded portion of each threaded stud. Hand-tight only.
13. Small Shade Ring (I) includes three chains that include an end clasp. Secure Small Shade Ring (I) to within Large Shade Ring (H) by connecting the end clasps of each chain to the upper frame of Large Shade Ring (H), as illustrated below.
14. Insert a **100-watt maximum E26 Type A bulbs** (no included) **23-Watt compact fluorescent bulb** (not included) into the Socket. **DO NOT USE BULBS WHICH EXCEED THIS SPECIFIED WATTAGE.**
15. Restore the power to the junction box and test the newly installed fixture.
16. Installation is complete!

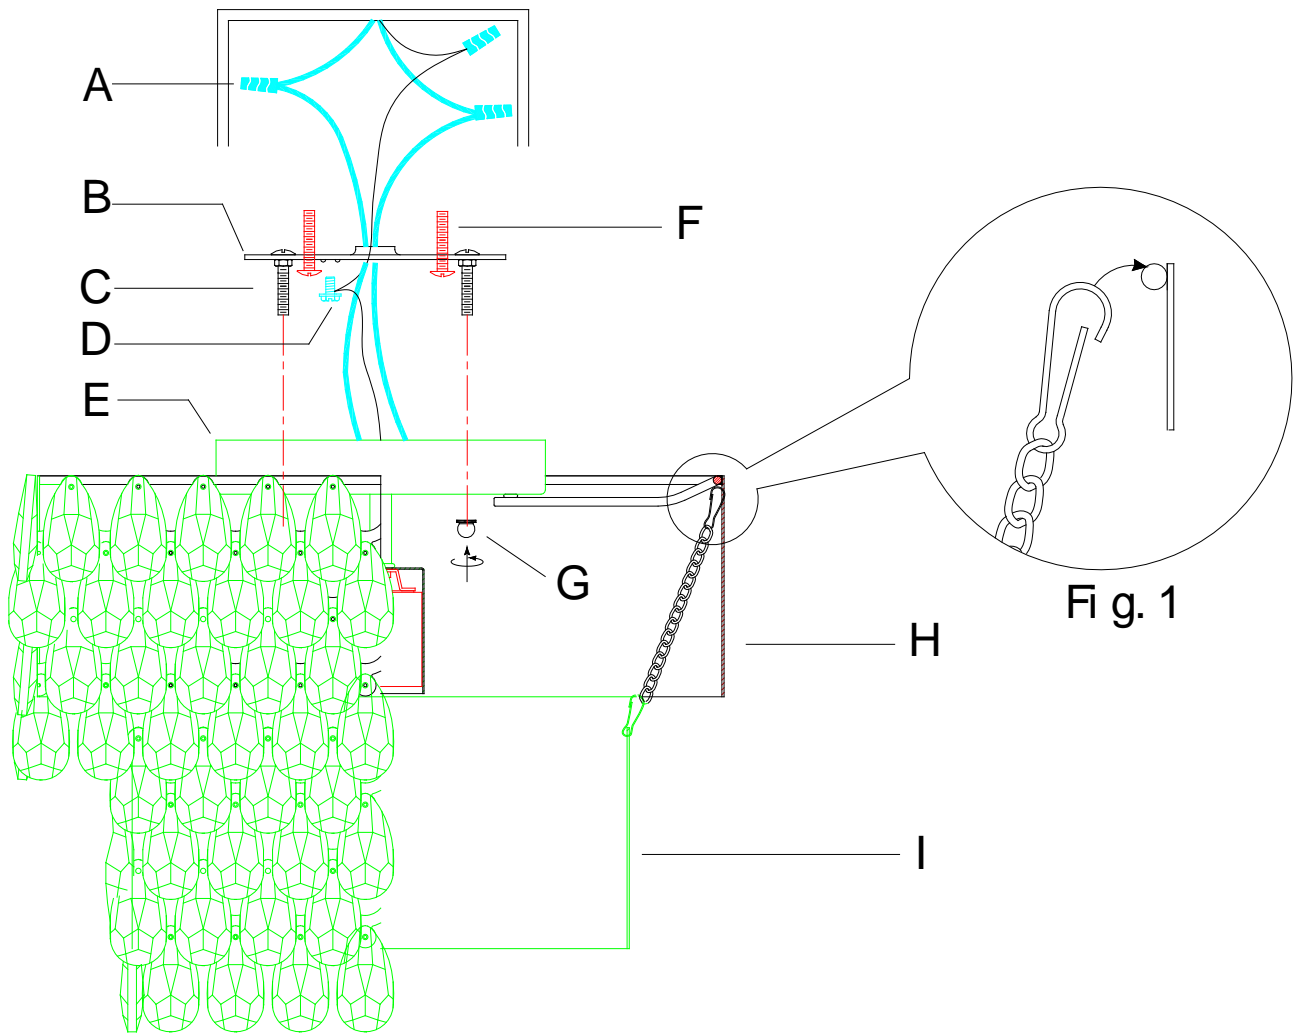

Care Instructions:

- Wipe with soft dry cloth for daily cleaning.
- Always avoid the use of harsh chemicals or abrasives as they may damage the finish.

Thank you for your purchase.

www.pbteen.com