

P O T T E R Y B A R N

Bennett Train Rack Mounting Instructions

The maximum weight capacity is 35 lbs (15.8 kgs). Do not exceed this load capacity.

For safe mounting it is important to use the proper hardware for your wall type. The hardware included is meant for drywall and wood studs only. If your walls are concrete, brick or plaster, please consult with your local hardware store for advice regarding the appropriate hardware required.

Parts Included:

- 1 Train Rack with (4) attached mounting brackets
- 4 Mounting plates
- 8 Screws
- 8 Drywall anchors
- 4 Hex screws
- 1 Allen wrench

Mounting Instructions:

1. With the help of another person, hold the train rack to a wall to determine a desired location. Use a level to ensure that the rack is held level and then using a pencil, lightly mark the wall around each circular mounting bracket. Set the rack aside.
2. Vertically position a mounting plate against the wall in the center of one of the drawn circles and use a pencil to mark the wall through the two holes located in each plate. These are the locations of mounting hardware. Repeat with the other mounting plates and drawn circles.

Locate the Studs:

3. The anchors provided with this item cannot penetrate wood studs. Therefore, we have to know if any of the eight marks on the wall happens to align with one. Use a stud finder to determine if the marks align with a wall stud. If any of the marks do, do not install an anchor at these marks. Instead, hold a mounting plate against the wall so that the holes align with the two marks and secure a screw (using a screwdriver) through each hole of the plate and into the wall and aligned stud. Rotate each screw clockwise until tight.

Mounting to Drywall:


4. For marks that do not align with a stud, use a Phillips screwdriver to install an anchor into the wall at the mark. Engage the head of the anchor with the screwdriver and gently push the anchor tip into the wall at one of the marks as you rotate it clockwise. As you rotate the anchor it will drive itself into the wall like a screw. Continue rotating until the wide flange is even with the wall surface. Repeat this step with the other anchor and non-stud-aligning marks.
5. Hold a mounting plate against the wall so that the holes align with the two installed anchors and secure a screw (using a screwdriver) through each hole of the plate and into the aligned anchor. Rotate each screw clockwise until tight.

6. Once all the mounting plates are secured to the wall, position the rack against the wall so that each mounting bracket is received by each installed mounting plate. Hook the upper rim of each bracket onto each plate. Use the supplied Allen wrench to tighten the small set screw located at the 6 o'clock position of each mounting bracket. This will lock each bracket to each plate.

Installation complete!

Care Instructions:

Wipe with a soft, dry cloth. To protect the finish, do not use household cleaners or abrasives

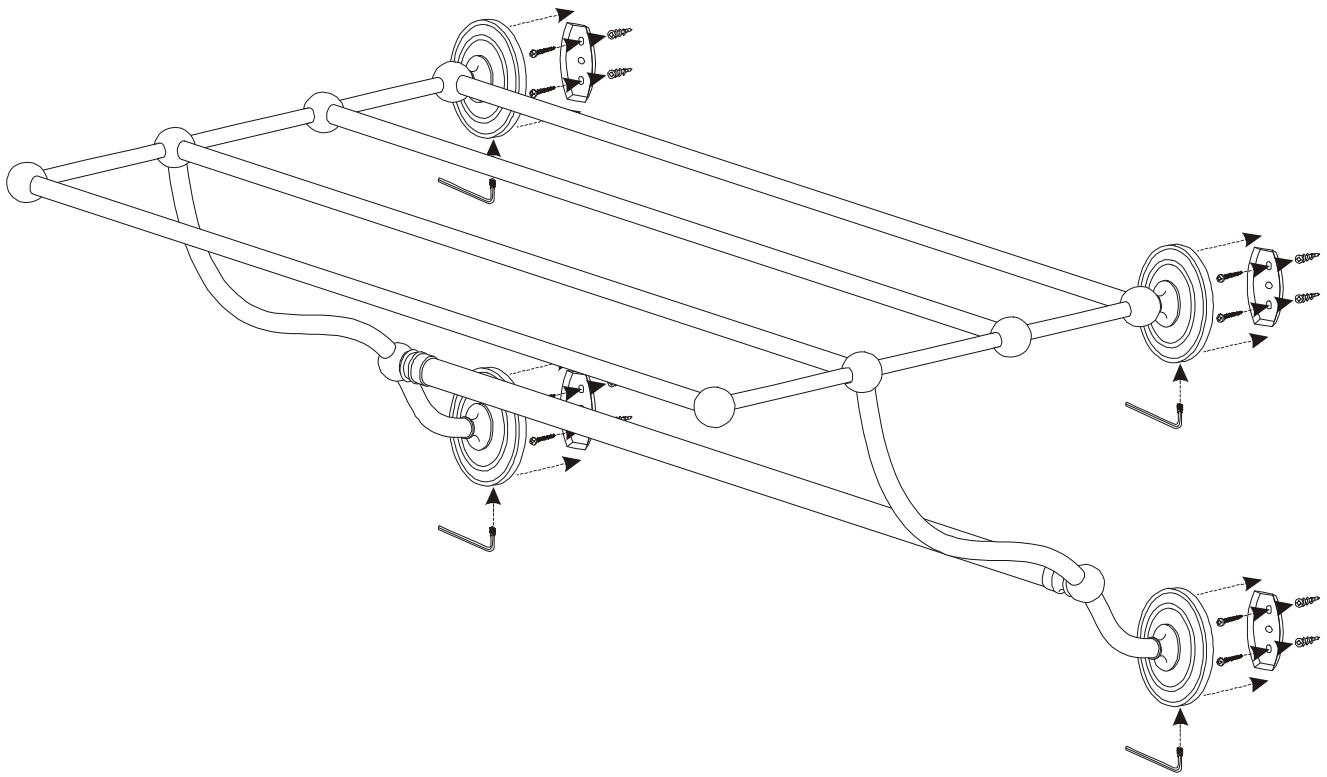

thank you for your purchase
stores | catalog | www.potterybarn.com