

**Important Safety Instructions:**

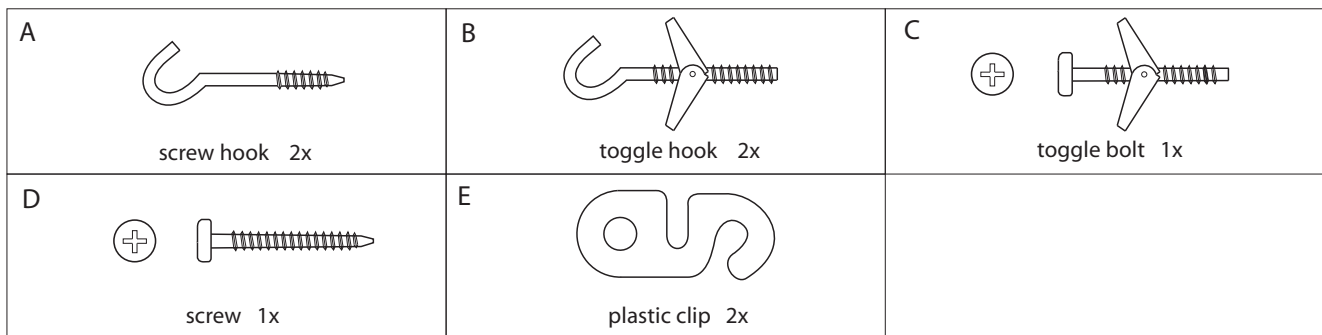
- Stud mounting is recommended. Use proper hardware for your wall type. When in doubt consult your local hardware store. For your safety, it is strongly recommended that two people hang the lamp.
- Electric bulb should be centered inside the pendant shade, making sure it does not touch the outer sides.
- For safety purposes, this lamp is equipped with a polarized plug (one blade is wider than the other). If the plug does not fit securely into your outlet, do not force it - contact a professional electrician. Use the plug with an extension cord only if it can be fully inserted into the cord's socket. Never alter the plug in any way.
- These instructions are provided for your safety. It is important that they are read carefully and completely before assembling fixture.
- This fixture has been rated for up to **(1) 60-watt maximum TYPE A standard bulb** (not included). To avoid the risk of fire, do not exceed the recommended wattage.

**Warning:**

- To reduce the risk of fire, electrical shock or personal injury, always turn off and unplug lamp and allow it to cool prior to replacing light bulb.**
- Do not touch bulb when fixture is turned on. Do not look directly at lit bulb.**
- Keep flammable materials away from lit bulb.**

**Pre-assembly:**

- Remove all parts and hardware from box along with any plastic protective packaging.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety and convenience, assembly by two people is recommended

**Hardware Included:**

- Screw Hook (A)
- Toggle Hook (B)
- Toggle Bolt (C)
- Screw (D)
- Plastic Clip (E)

**Parts Enclosed:**

- Socket (F)
- Socket Ring (G)
- Shade (H)
- Top Cap (I)
- Top Cover (J)

**Assembly:**

1. Insert screw hooks (A) into ceiling joists at desired location. If mounting into drywall, use toggle hooks (B).
2. Hang plastic clips (E) onto hooks as shown.
3. Unscrew top cap (I) from top cover (J).
4. Fasten top cap (I) to ceiling using screw (D) if screwing into ceiling joist, or using toggle bolt (C) if mounting to drywall.
5. Hang socket by screwing top cover (J) to top cap.
6. Insert lamp cord into clips.
7. Remove socket ring (G), set shade (H) on socket (F), and screw socket ring back on to secure shade.

**Care instructions:**

- Clean with soft, dry cloth.
- Always avoid the use of harsh chemicals or abrasive cleaners as they may cause damage to the lamp.

