



# Better Forecast/Warning Tools and Techniques

## Observation-based Severe Convective Tools


Travis Smith; CIWRO Senior Research Associate; WRDD

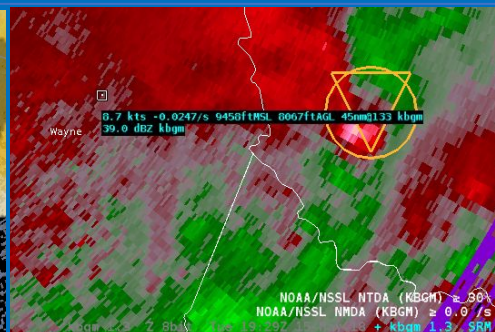

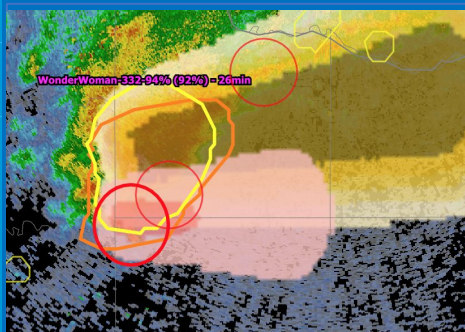

# History - observation-based severe convective tools

- Ongoing at NSSL since at least the 1990s
- Early WSR-88D algorithms
- Multi-Radar/Multi-Sensor
- Very heavy collaborative effort with the NWS and other end users

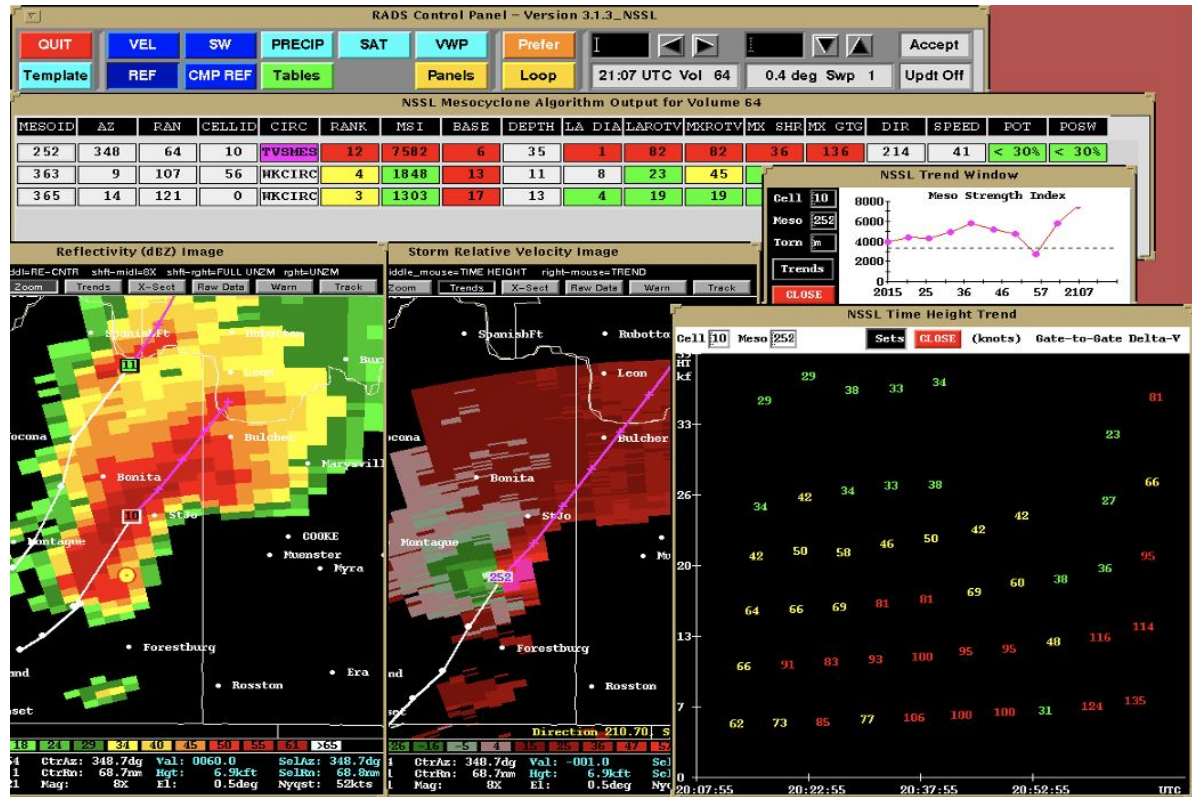

# History - observation-based severe convective tools



- Founding of HWT Experimental Warning Program
- Foundations of FACETs / Probabilistic Hazard Information (PHI)





# New Technologies

Machine learning (since the 1990s) - detection and short-term prediction of:


- Tornadoes
- Hail
- Damaging Convective Wind
- Flash Flooding

How do humans use these tools?

Newer web technologies

- Georeferenced data
- Modern databases

Quantifying and managing uncertainty at 0-60 minute scale

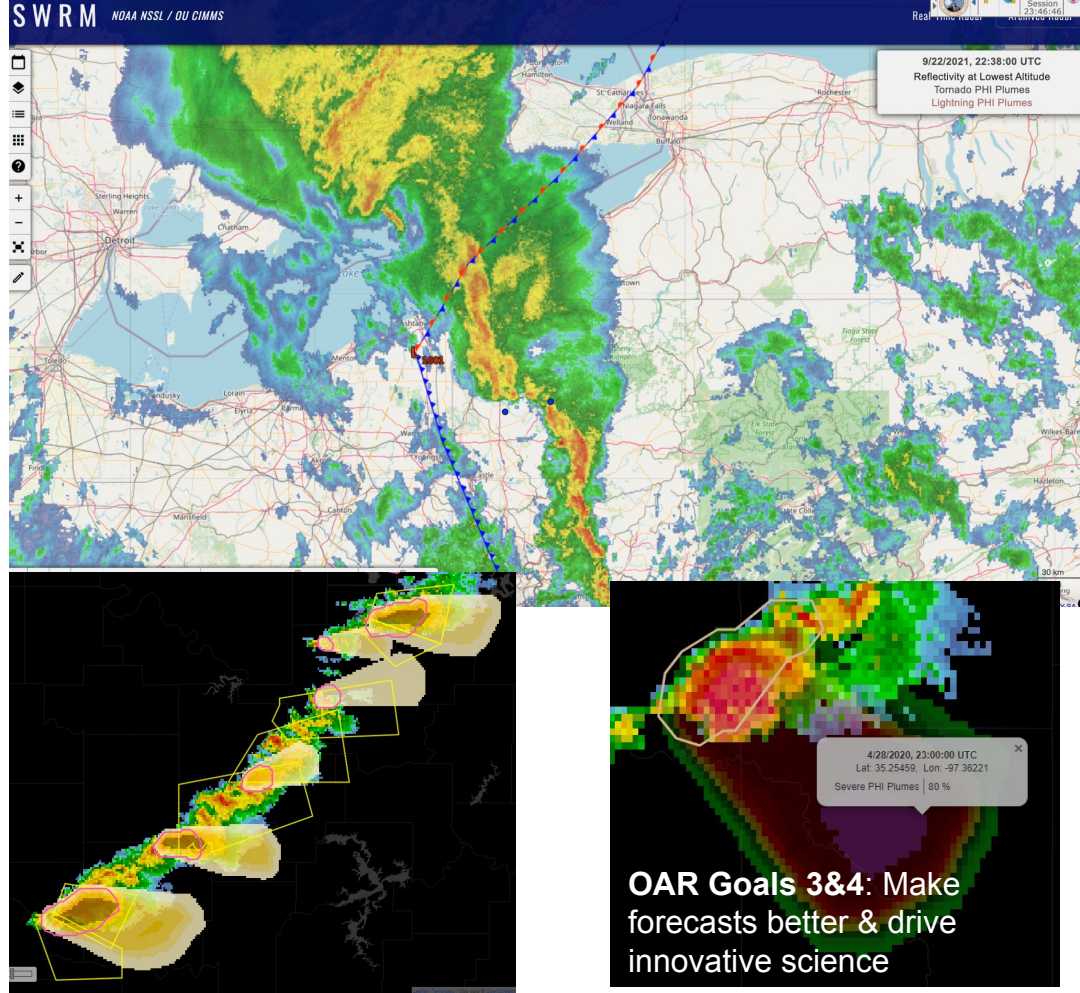






# Large Radar Datasets, Machine Learning, and Storm-scale probabilistic hazard guidance

Over 2 decades worth of WSR-88D data covering the CONUS

Quality controlled CONUS data from 1998-2011 (more to come)

- Range of storm behaviors
- Climatology
- Training machine learning applications
- Validation of NWP models
- Guidance for “strike” probabilities

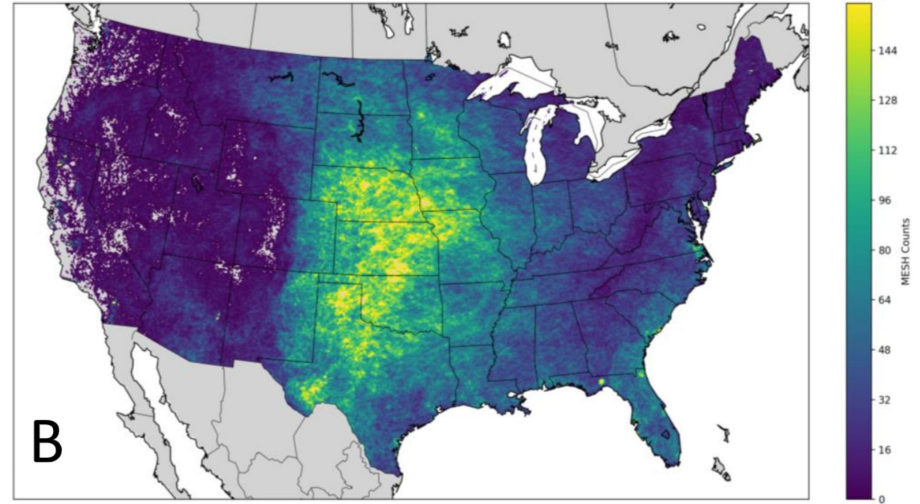


MYRORSS hail occurrence 1998-2011





# Satellite, Lightning and Flash Flood Research

- Satellite R&D has greatly expanded with the new applicability to severe weather following the launch of the GOES-R series of satellites.
  - New products and algorithms
  - Data assimilation & machine learning
  - No longer dependent on radar data alone.
- Flash flood guidance change the paradigm of how flood threats are evaluated.:
  - very high resolution terrain
  - vegetation
  - MRMS precipitation estimates

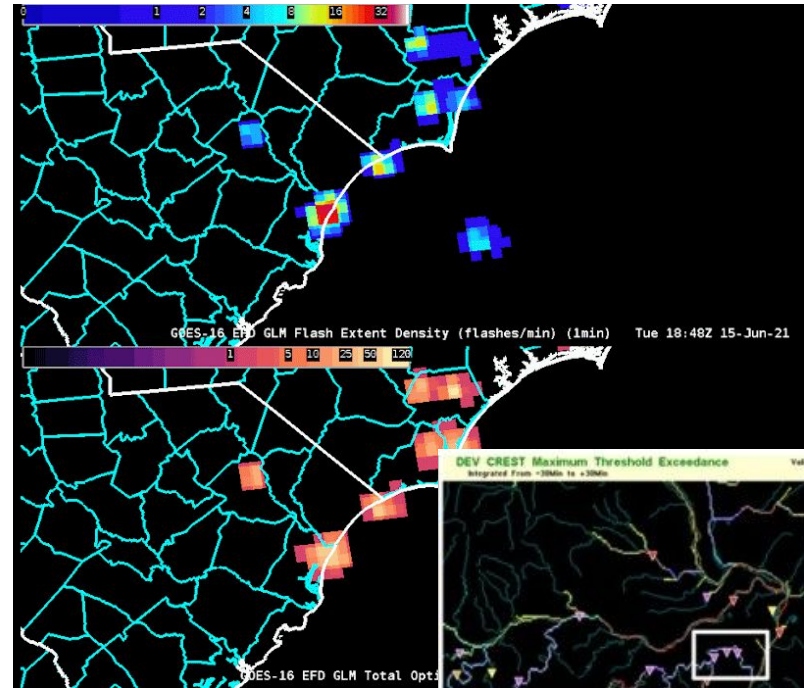



# Quality & Performance

**2016 & 2018 National Weather Association Larry R. Johnson Special Award** - for the successful transition to operations of applications that assist forecasters with warning operations and observations (MRMS-Severe and mPING).

**Over 70 refereed publications since 2015**

**Students mentored / degrees granted:**


- Ph.D: 7
- MS: 8
- Undergraduates: 19 UGRAs, 5 REU, 11 OU Meteorology Capstone

**24 Hazardous Weather Testbed experiments**  
led since 2015





# Collaborators



## MRMS



## Weather Enterprise



## Willis Towers Watson



## Broadcast Meteorologists

Research

Operations & Users



# Upcoming presenters

2. Multi-year reanalysis of remotely sensed-storms (MYRORSS) and Machine Learning Applications



Kiel Ortega

3. Storm-scale Probabilistic Hazard Information (PHI)



Dr. Kristin Calhoun

4. Storm-scale PHI with NWS Core Partners




Holly Obermeier

5. Satellite and Lightning Convective Tools and Research




Dr. Kristin Calhoun

6. Flooded Locations and Simulated Hydrographs Project - FLASH



Dr. Jonathan J. Gourley







# Observation-based severe convective tools

## Multi-year reanalysis of remotely sensed storms (MYRORSS) and Machine Learning Applications

Kiel Ortega; CIWRO Research Associate III; WRDD

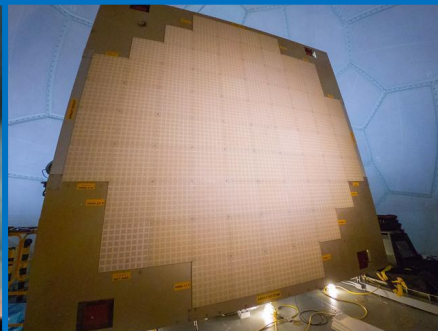






# MYRORSS Timeline

## Re-running of poor QC cases continues

Data processing started in 2012, finishing in 2014 and intensive quality control continuing from there. Reprocessing of azimuthal shear data using updated software begins.

## Data set openly available

A DOI was minted through OU and the data set made available via DropBox. Derivative data set of storm clusters created.

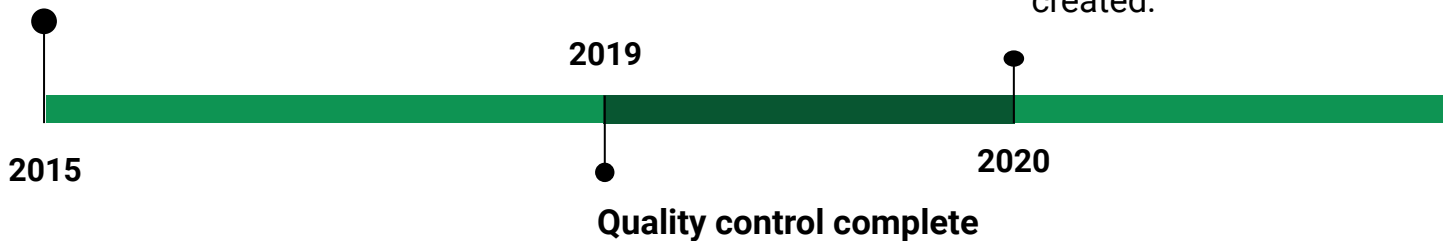

Initial data set, from April 1998 through 2011, finished.





# MYRORSS Products

- Data from April 1998 through 2011 completed
- Includes 3D reflectivity, 2 azimuthal shear layers (low- and mid-levels)
  - Data are essentially MRMS data with manual quality control
- Reflectivity derived products, such as echo tops and a hail size estimate, included
- Near-storm environment data from operational forecast models completed
  - For product creation, isothermal heights (e.g. height of 0°C) are needed
  - Derivative products include many near-storm parameters, like instability and wind shear




Domain outlined plus representation of the vertical grid





# Quality Control Matters



- Need research-quality data set for proper development of machine learning models
- Re-processing of data can help identify shortcomings in radar data quality control as research quality data requires review of the processed data

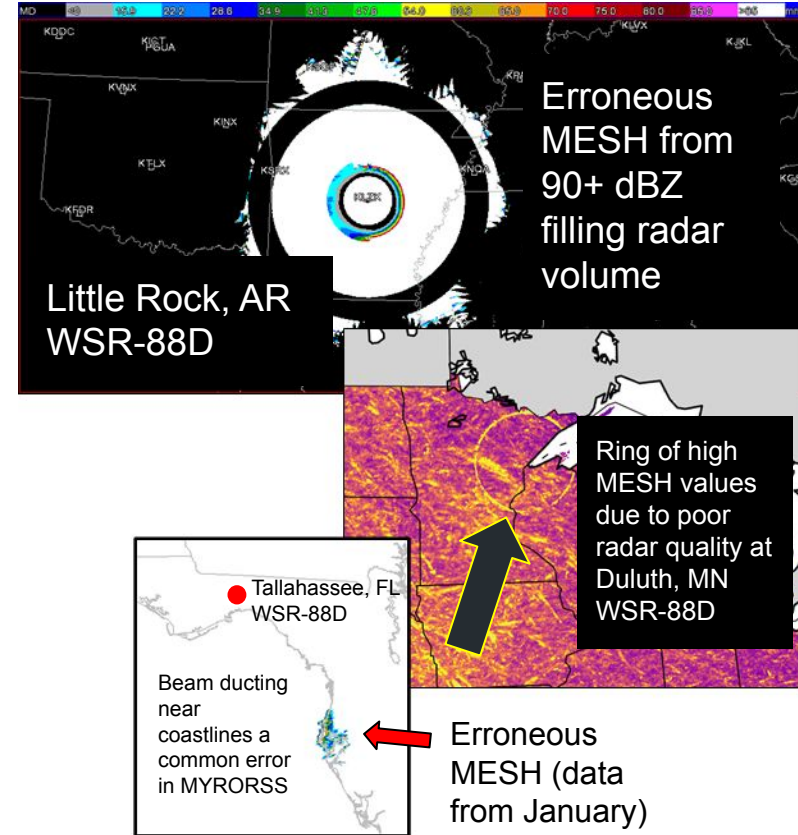





# MYRORSS - Initial Climatology Development

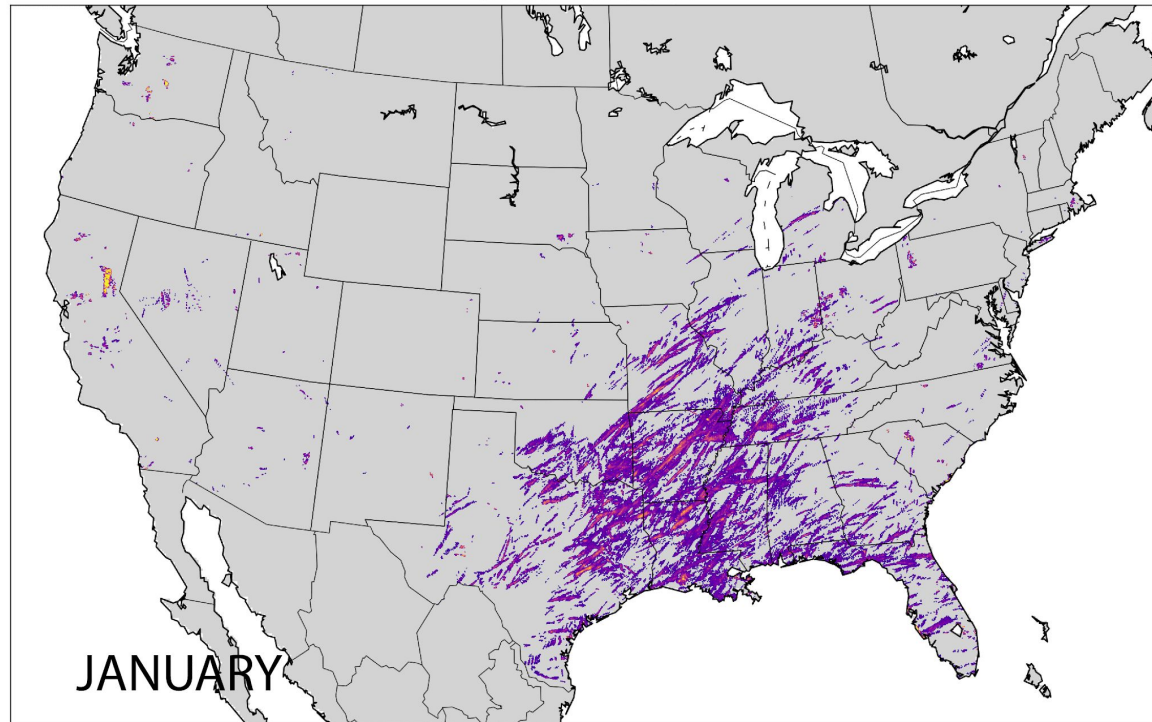

Maximal MESH value for each month (accumulated over the entire 1998-2011 period)






# MYRORSS - Storm Object Database

- Developed database using image segmentation
- Currently being used to develop probabilities for attendant thunderstorm hazards leveraging ML
- Can be used to develop storm climatologies

Storm Clusters Associated with EF1+ Tornadoes (April 2011)

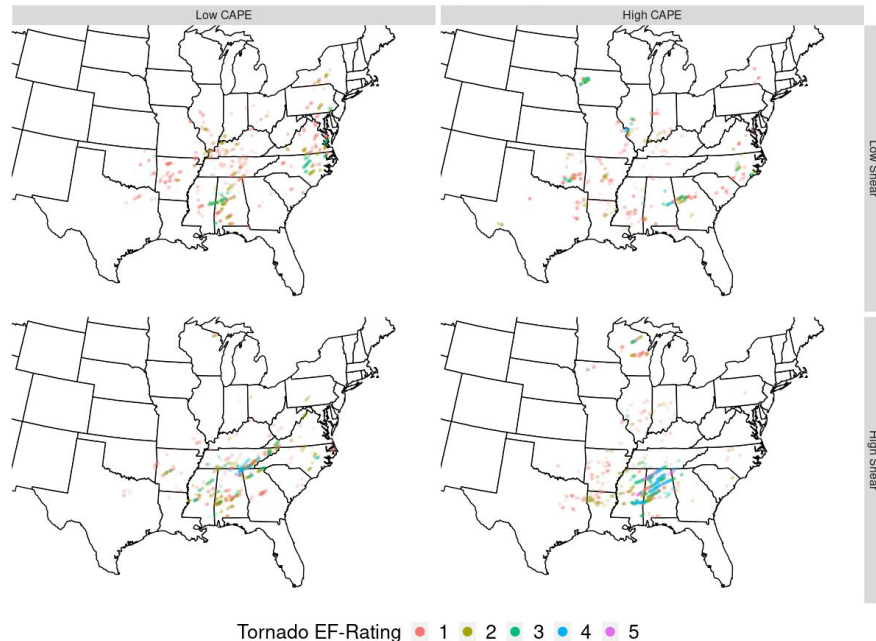



# MYRORSS - Open Data and Open Science

- In 2020, MYRORSS was publicly released and is accessible to all
- A BAMS article is in review summarizing the dataset and processing
- Several groups have already utilized the dataset for research
- NOAA Big Data Program hosting pending final approval

Home

Project Wiki Pages

- Home
- Data Sharing and Policies
- How to Use MYRORSS Data

View

Wiki Version: (Current) Williams, Sklar, 2021-03-23 19:07:30+00:00 UTC

The Multi-Year Reanalysis of Remotely Sensed Storms (MYRORSS) project uses the Multi-Radar Multi-Sensor (MRMS) framework to blend radars along with near storm environmental data to create a three-dimensional radar volume across the entire CONUS. Currently, MYRORSS has reprocessed the WSR-88D radar archive for 1998 through 2011.

March 2021 Update: There are now two ways for the MYRORSS data to be stored. MYRORSS data includes the original MYRORSS data, Azchear products, and additional Echo Top Products reprocessed out. MYRORSS data being included at the SAME products organized differently. All 20 products including the Azchear and Additional Echo Top Products are stored in one tar file per date while the MergeReflectivityQC (D Reflectivity radar volume) is separated. The MergeReflectivityQC product is the most storage intensive product of all the MYRORSS products so this additional reorganized data will allow easier access to the other products.

### MYRORSS\_Data

MYRORSS\_Data includes the original MYRORSS data, Azchear products, and additional Echo Top products.

Original MYRORSS data includes:

- EchoTop\_18: Echo Top Heights for 18 dBZ, units: km
- EchoTop\_50: Echo Top heights for 50 dBZ, units: km
- MergeM\_Shear: Due to reprocessing, these data are incorrect. Please see Azchear directory for correct data.
- MergeM\_Shear: Due to reprocessing, these data are incorrect. Please see Azchear directory for correct data.
- MergeReflectivityQC: This is the three-dimensional radar volume with vertical resolution of 2.5 km for 0.5 km - 3 km, 0.5 km for 3 km - 9km, 1 km for 9 km - 20km, units: dBZ.
- MergeReflectivityQCComposite: This is the maximum reflectivity volume for the columns from the three-dimensional grid in a flat field, units: dBZ.
- MergeRadarTable: These data are net files and give information about the radars involved in the merger for the timestamp.
- MESH: Maximum Estimated Size of Hail, units: mm
- Reflectivity\_QC: Reflectivity at isotherm 0C, units: dBZ
- Reflectivity\_10C: Reflectivity at isotherm -10C, units: dBZ
- Reflectivity\_20C: Reflectivity at isotherm -20C, units: dBZ
- ReflectivityAtLowerAltitude: Reflectivity at lowest altitude, units: dBZ
- SMI: Severe hail index, units: g/m3
- VIL: Vertically integrated liquid, units: kg/m<sup>2</sup>

NOTE: MergeM\_Shear and MergeM\_Shear: Due to algorithm changes, MergeM\_Shear and MergeM\_Shear products are incorrect within the MYRORSS\_orig archive. To access updated products, each year folder has a folder name "Azchear" with corrected data within a Zip archive file for each date.

Azchear data includes:

- MergeM\_Shear: Merged low-level azimuthal shear (0-3 km AGL), units: 1/s
- MergeM\_Shear: Merged mid-level azimuthal shear (3-6 km AGL), units: 1/s
- MergeRadarTable\_LL\_Shear: These data are net files and give information about the radars involved in the merger for the timestamp for the MergeM\_Shear product.
- MergeRadarTable\_ML\_Shear: These data are net files and give information about the radars involved in the merger for the timestamp for the MergeM\_Shear product.

<https://doi.org/10.15763/DBS.CIMMS.MYRORSS.DATA>





# Future work

- Processing of contemporary data to complete archive through present
  - Including polarimetric products and potentially full 3D fields of azimuthal shear and divergence
  - Higher resolution? (~500-m, 2-min update frequency)
- Continue to develop derivative data sets (e.g., hail climatology)
  - Summarize data into databases for easier use by external users
- Continue developing storm cluster database
  - Time-matching clusters for storm tracking
- Use machine learning to continue exploration of severe storms
  - Continue work to model warning verification probabilities
  - Continue to use machine learning to use MYRORSS-based data to develop better climatologies
- Combine contemporary data with satellite data as satellite data archives allow











# Observation-based severe convective tools

## Storm-scale Probabilistic Hazard Information (PHI)


Kristin Calhoun, PhD; NSSL Research Scientist; WRDD

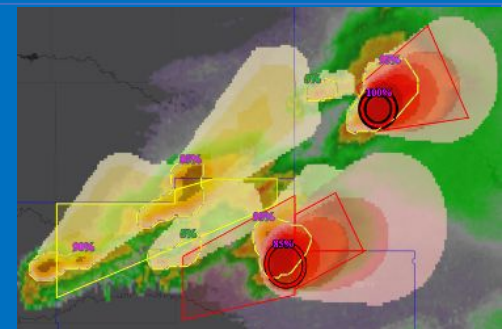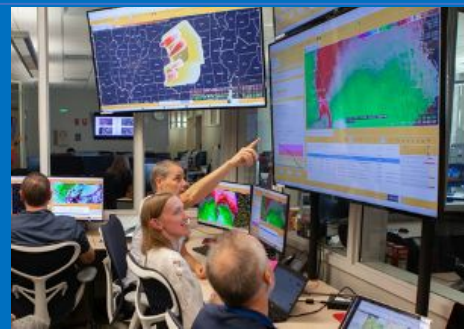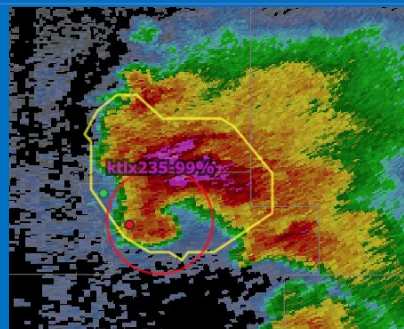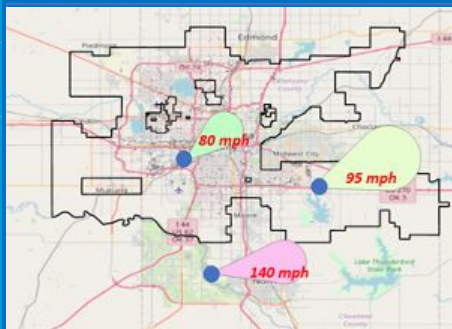



# Why Probabilistic Hazard Information?

- More specific regarding time (when storm will affect location, when it will end);
- More specific regarding space (smaller aerial coverage advects with storm);
- More specific intensity estimates;
- Defines the temporal, spatial, and intensity uncertainties of the threats. Allows for longer lead-times, though with higher uncertainty;
- Updates continuously in real-time to reflect changes in storm motion and evolution.

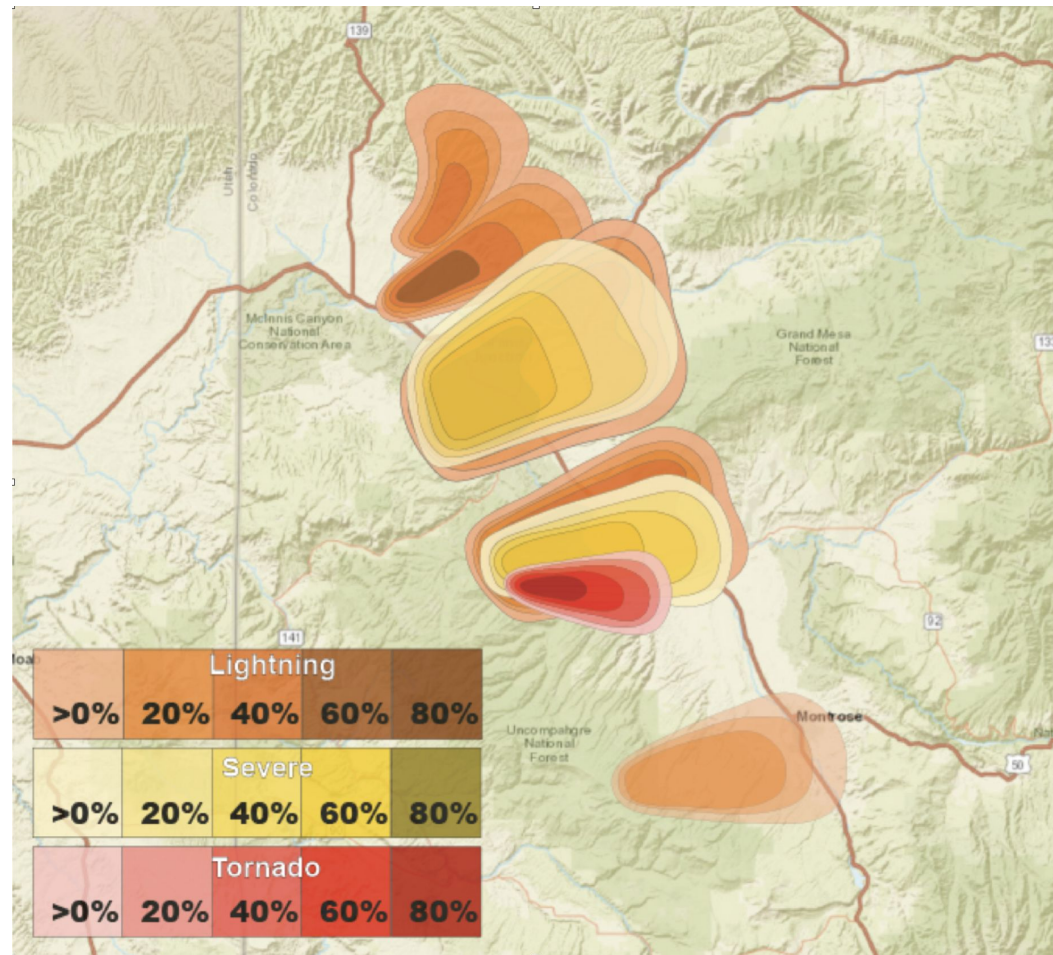





# Object characteristics

**NSSL Prototype Probabilistic Hazard Information (PHI) Tool**

**Hazard Information**

PHI Configuration | Object History | Settings

ID/Start Time: 3 22:58:03 UTC  
 Hazard: Tornado  
 Severity: Radar Indicated | Catastrophic

Motion/Duration: 254 @ 24 kts for 60 minutes  
 Direction Uncertainty: 15 °  
 Speed Uncertainty: 8 kts  
 Turning Options

Reset Motion Changes

Guidance: Peak Shear: kts ProbTor

Trend Interpolation: Draw Linear Exp1 Exp2 Bell +5 -5  
 UNDO REDO Grid Preview


Estimated Probability of Tornado Occurrence

Storm State: Steady State Evolving Keep Alive  
 Estimated probability graph will not change with the passage of time.

DISCUSSION: Clear

Hazard Strike Probabilities

# Hazard-storm object (automated or user created)

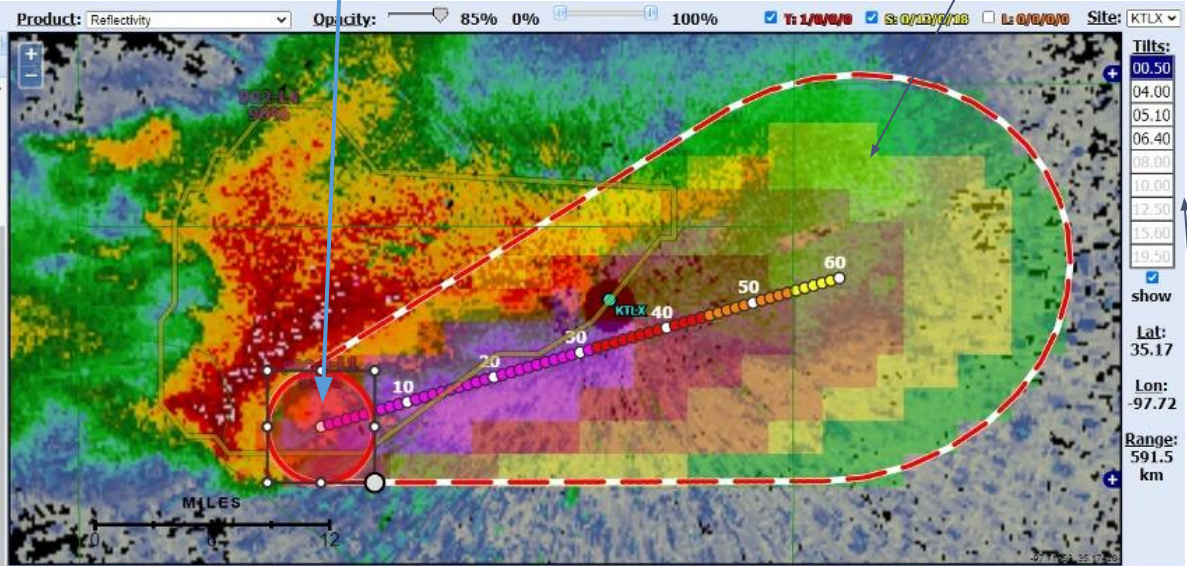

# Hazard Strike Probabilities

**Hazard Services Console**

Time: 06 May 2015 22:59:10 Z Slider: 06 May 2015 22:58:03 Z Resume Simulation

ID	Hazard	State	Probability	Forecaster	Time Issued	Start Time	End Time	Time Left	Time Last Modified
m62143	Severe	Issued	94	pac	06-May 22:45 Z	06-May 22:56 Z	06-May 23:56 Z	57 min, 27 sec	14 min, 0 sec
M3	Tornado	Updating	100	pac	06-May 22:58 Z	06-May 22:55 Z	06-May 23:58 Z	56 min, 38 sec	3 min, 9 sec
m63661	Severe	Issued	24	PHI	06-May 22:56 Z	06-May 22:56 Z	06-May 23:56 Z	57 min, 27 sec	
m63535	Severe	Issued	85	PHI	06-May 22:56 Z	06-May 22:56 Z	06-May 23:56 Z	57 min, 27 sec	
m62759	Severe	Issued	28	PHI	06-May 22:56 Z	06-May 22:56 Z	06-May 23:56 Z	57 min, 27 sec	

List of all hazards

Environ/radar controls



**Hazard Information**

PHI Configuration | Object History | Settings | Legend

ID/Start Time: kenx75 19:36:22 UTC [Reset]

Hazard: Tornado

Severity: Radar Indicated | Considerable

Motion/Duration: From 271° @ 21 kts for 41 minutes

Direction Uncertainty: 15°

Speed Uncertainty: 8 kts

Turning Options

[Reset Motion Changes]

Object Shape/Pos:  from Automation

Buffer: 0 km Offset X: 0 km Dir: -1° Offset Y: 0 km

Guidance: Peak Shear: [ ] kts PHItor ProbTor (from overlapping ProbSevere object)


Trend Interpolation: Draw Linear Exp1 Exp2 Bell +5 -5 Obs

[UNDO] [REDO]  Grid Preview

**Estimated Probability of Tornado Occurrence**

Storm State:  Steady-State  Evolving Growth to Peak

Estimated probability graph will not change with the passage of time.

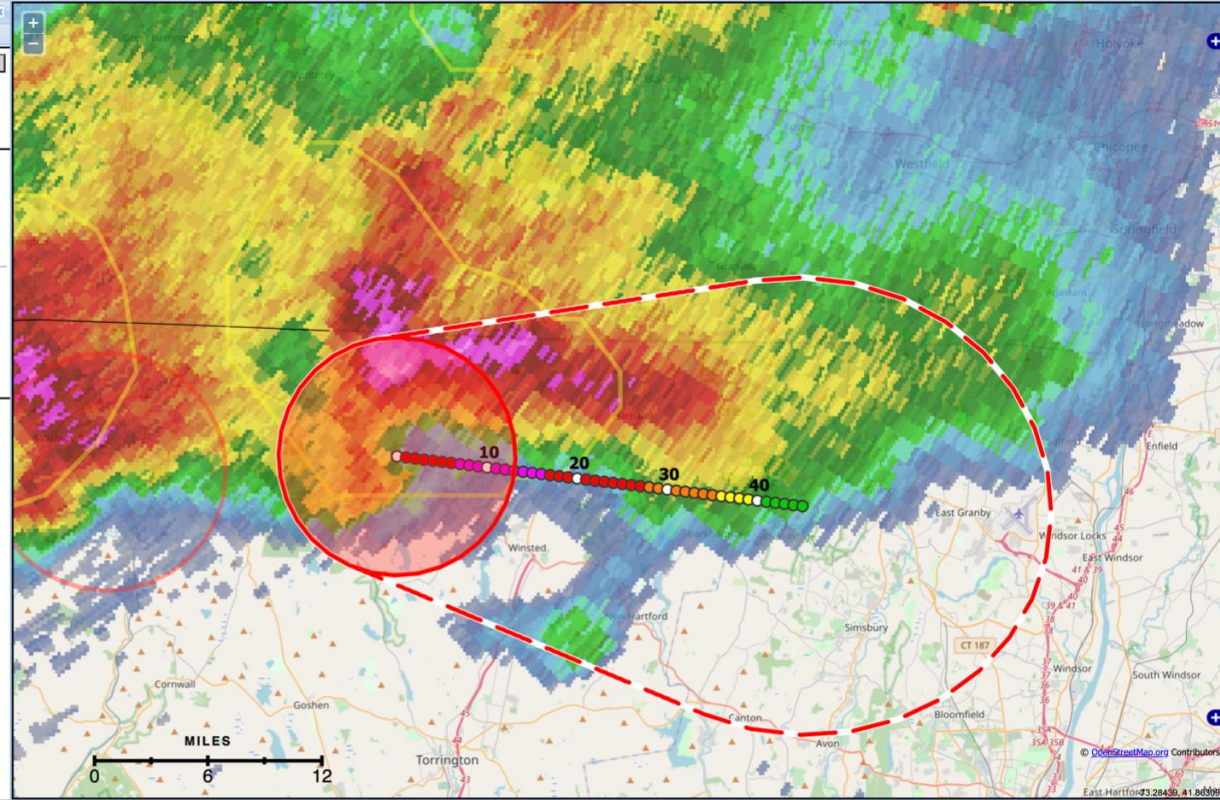

Site: KENX

Tilt: 00.50

Show Radar:

Click map for values

Lat: --

Lon: --

Range: --

Hazard Services Console

Time: 15 May 2018 19:39:39 Z Slider: 15 May 2018 19:36:22 Z [Pause Simulation]

ID	Hazard	State	Probability	Forecaster	Time Issued	Start Time	End Time	Time Left	Time Last Modified
m349	Lightning	Issued	100	Kristin	15-May 19:37:38 Z	15-May 19:35:43 Z	15-May 20:35:43 Z	56 min.	2 min.
kenx75	Tornado	Pending	70		15-May 19:34:49 Z	15-May 19:36:22 Z	15-May 20:21:22 Z	42 min.	








# PHtor: Tornado Probabilities

Data extracted from a 2.5-km radius centered on nearest AzShear max.


- velocity, spectrum width, polarimetric values
- Median filtered, 0.5°-tilt single-radar
- Rotation max, min, and percentiles
- Range from radar

Fully automated or “Point and click” tornado probs: creates object based on strongest rotation with 2.5 km of click using most recent radar data.

Produces a current tornado probability (*not a forecast - yet*).

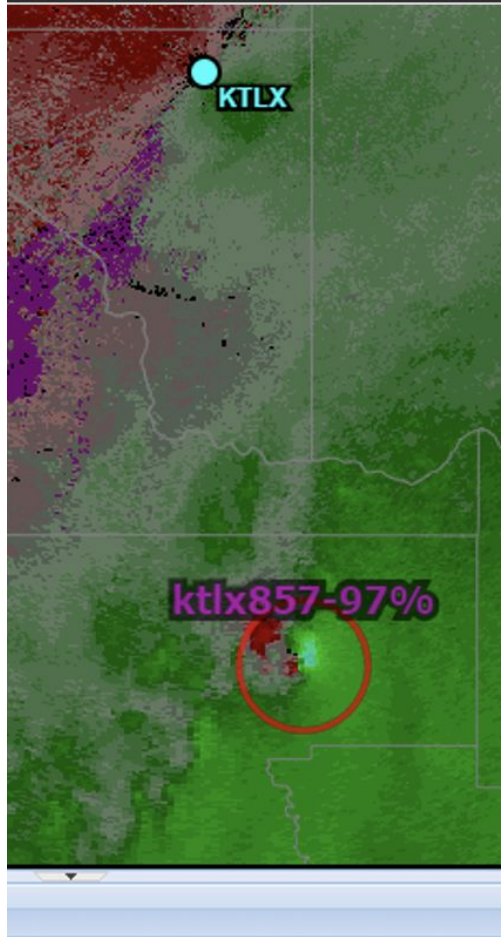

28 Apr 2021 05:04:30 Z

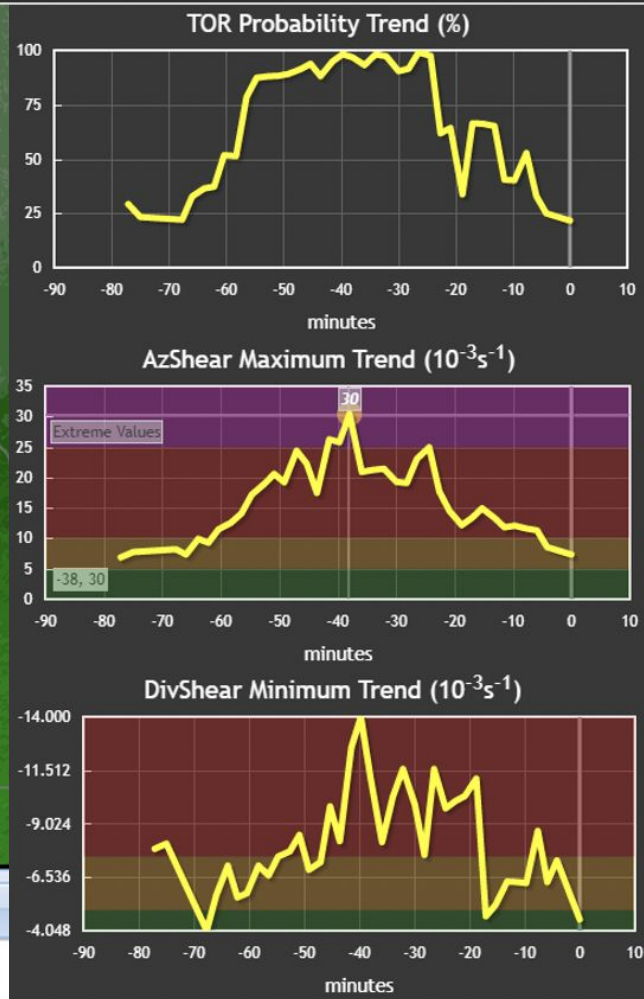



# ProbLightning: 1-hour Cloud-to-Ground Lightning probabilities



Random Forest with data from lightning detection networks, MRMS, environment.

Tuned for CONUS or individual NWS regions and 15 min intervals out to one hour.

**Emergency Managers loved the new information:**

*“This tool is very important and could see it being incredibly important for the university or any park, NASA... all locations, airports, military installations.”*

*“The objects themselves make me feel more confidence. Usually just getting the actual lightning strikes. **Everything used to be reactionary, this is more proactive.**”*

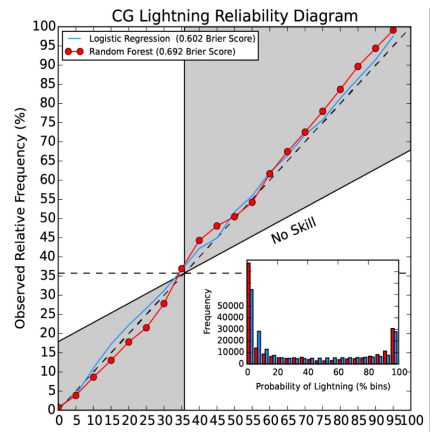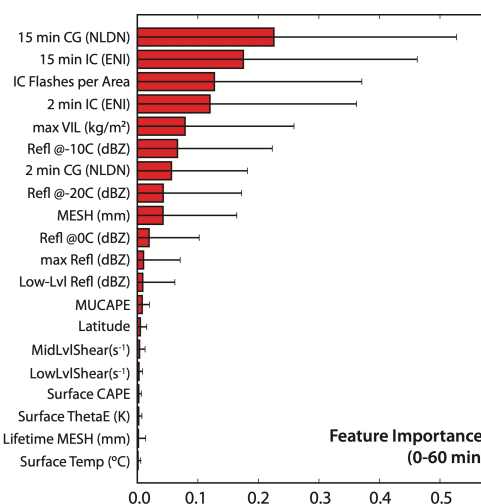

ATMOSPHERIC SCIENCES News

## New Model Predicts Lightning Strikes; Alert System to Follow

Data from thousands of past storms help guide a new forecast model that predicts where and when lightning may hit.



Researchers are developing an early-warning system for cloud-to-ground lightning strikes, like this bolt that struck near an open field. Credit: skeeze via Pixabay, CC0 1.0

By Kimberly M. S. Cartier 11 December 2017





# Hazardous Weather Testbed Experiments

Virtually (Spring 2021):

**NSSL Prototype Probabilistic Hazard Information (PHI) Tool**

Product: Reflectivity    Opacity: 81%    Ts 2/1/0/0    Ss 0/2/2/0    Ls 2/0/0/0

Guidance: Peak Shear: [ ] kts    ProbTor

Trend Interpolation: [Draw] [Linear] [Exp1] [Exp2] [Bell] [+5] [-5] [Obs]

[UNDO] [REDO]    [ ] Grid Preview

**Estimated Probability of Tornado Occurrence**

Storm State:  Steady-State     Evolving/Decay, Keep Alive

Estimated probability graph will shift to the left with the passage of time.

Hazard Services Console


Time: 19 Jul 2018 21:13:05 Z    Slider: 19 Jul 2018 21:11:57 Z    [Pause Simulation]

ID	Hazard	State	Probability	Forecaster	Time Issued	Start Time	End Time	Time Left	Time Last Modified
5					19-Jul 19 UTC	30	45	15	19-Jul 20 UTC
15					19-Jul 19 UTC	30	45	15	19-Jul 20 UTC

Meeting details







Participants: You, Thea Sandmael - NOAA Affiliate, Pat Hyland - NOAA Affiliate, Matt Anderson - NOAA Federal

Integrated Warning Team (with Emergency Managers and Broadcast Mets, 2016-2017):

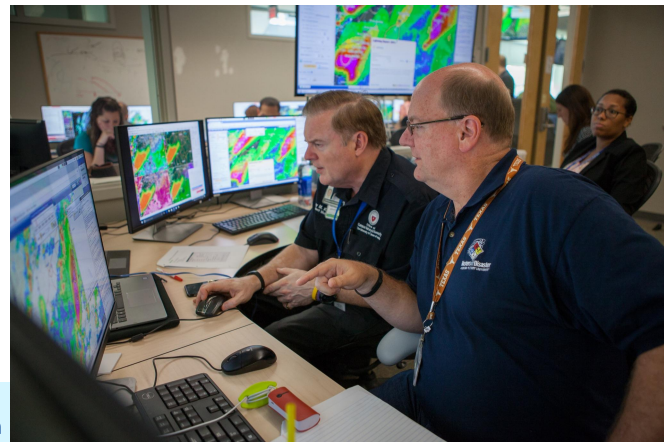




# Example of forecaster produced PHI in HWT

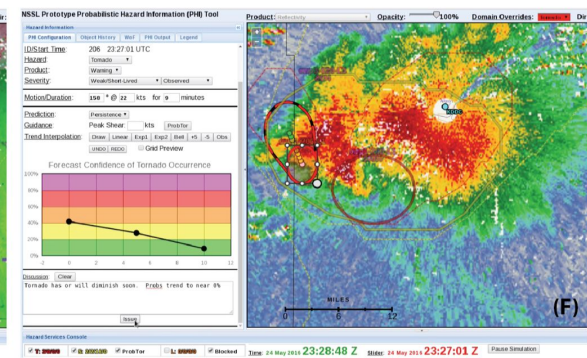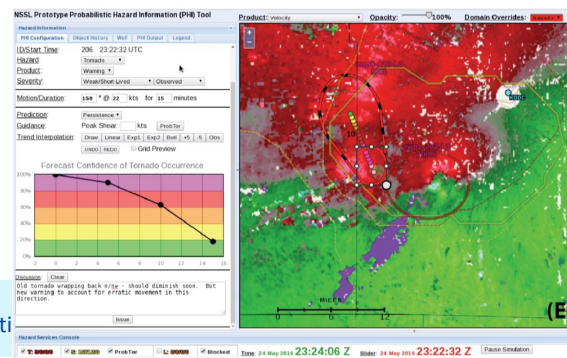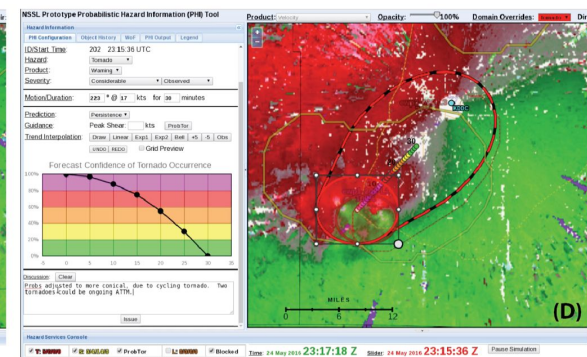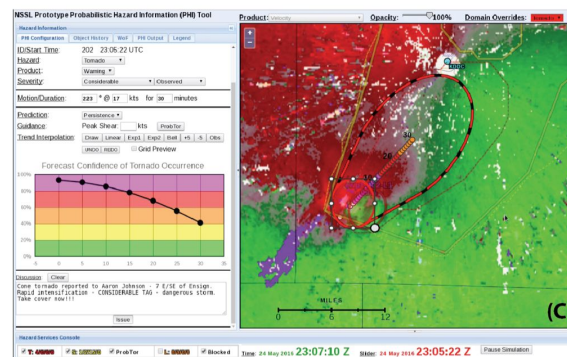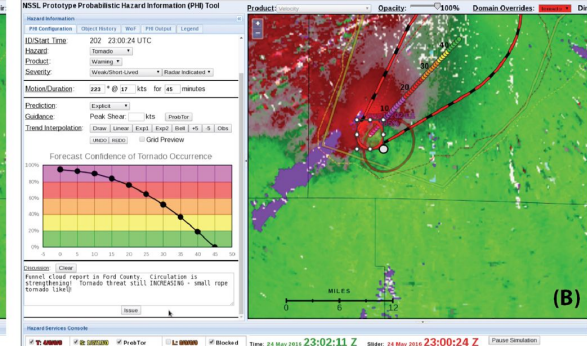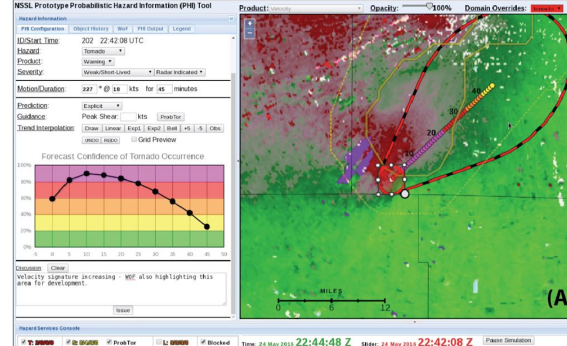




# Ongoing and Upcoming Development

- Automated impacts guidance - uses machine learning with past damage indicators, structure type records, and local zoning information
- Test rapid update capabilities with forecasters in HWT
- Extend forecast probabilities through additional machine learning approaches and blending of Warn-on-Forecast
- Continue to work with Global Systems Laboratory for Hazard Services connected development (Threats-in-Motion and PHI connection)

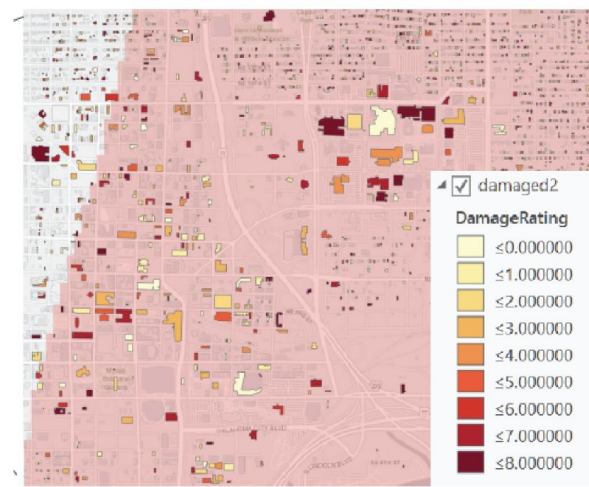




# Observation-based severe convective tools

## Storm-scale PHI with NWS Core Partners

Holly Obermeier; CIWRO Research Fellow; WRDD

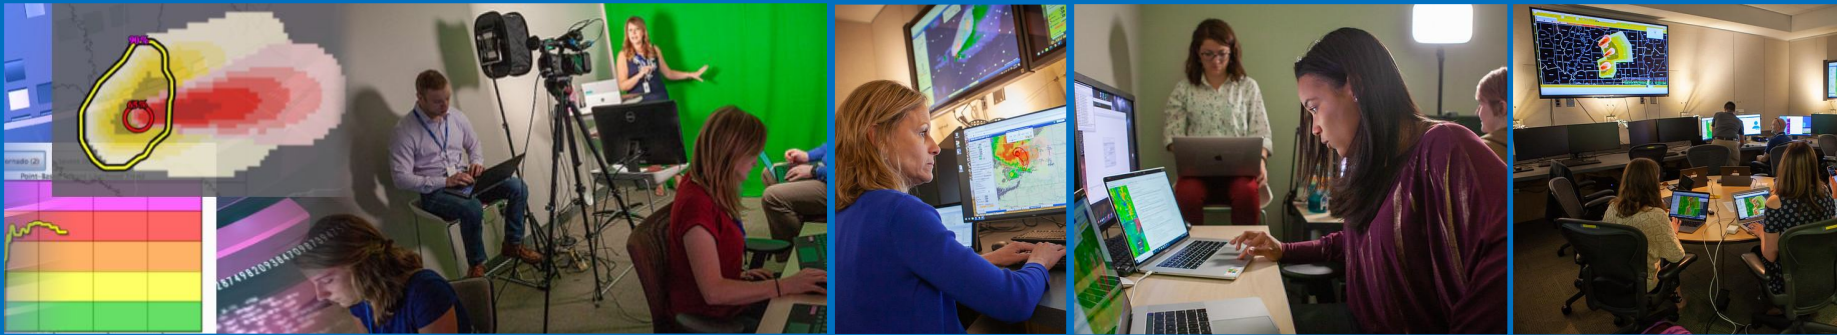



## Why are we engaging NWS core partners?


- Leveraging **user-centered design** principles, we created a capability to **engage** emergency managers, broadcasters, and forecasters (as user groups).
- Their **insights, preferences, and needs** increasingly drive our innovation process.






# History of Core Partners & Probabilistic Hazard Information


First year for emergency managers



2 emergency managers & 1 broadcast meteorologist per week



Redesigned EM timeline, 4 emergency managers & 2 broadcast meteorologists per week



Nationwide survey of emergency managers

2015

2017

2019

2021



2016

2018

2020




First year for broadcast meteorologists, Full Integrated Warning Team

4 emergency managers & 2 broadcast meteorologists, first year with the fully-functioning studio



Focus groups with emergency managers, search & rescue, land managers, wildland fire teams with NWS Grand Junction

Nationwide survey of broadcast meteorologists








# Why do we engage these core partners?




- Engaging NWS core partners **early** allows them to **set the requirements** for future NWS products
- When new research transitions, it **meets partners' needs** - they are **able** and **can** use the product effectively

*Broadcast meteorologists are still the primary source of tornado warning information across all regions of the United States. Sirens are an important function of EM duties and are still used commonly (right).*

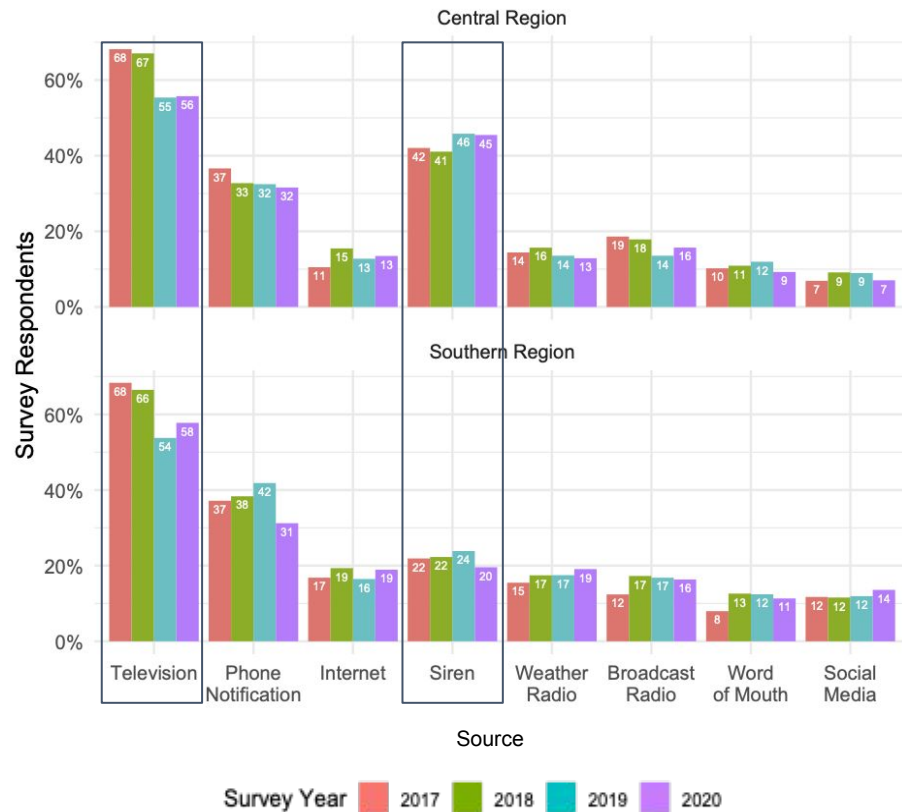

# Key Findings: Warnings

- Core partners **need** a warning - probabilistic thresholds alone **don't work** for severe convective weather
- Warnings have **layers of meaning** beyond likelihood & always require **NWS forecaster** judgment and intervention

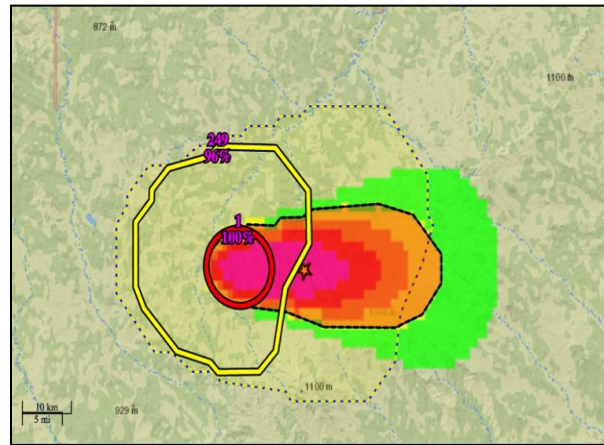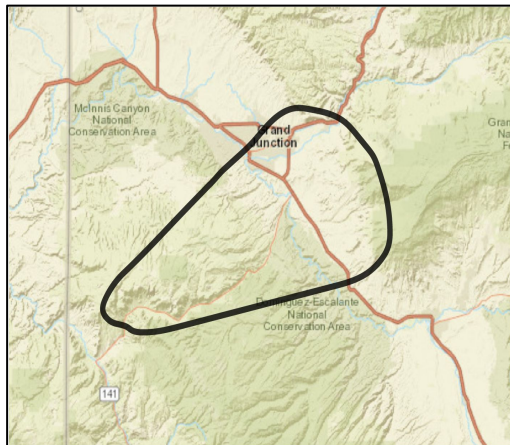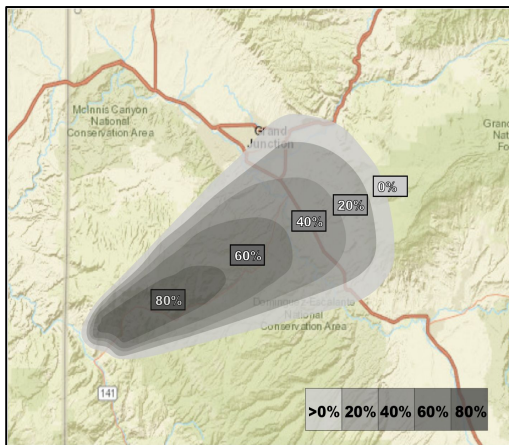


# Key Findings: Emergency Management

- Experiment evolution includes a **complete decision-making timeline** (including days & hours before)
- Partnership with Oklahoma State Department of Emergency Management supports experiment development, especially **naturalistic decision elements**



# Key Findings: KPHI-TV




- Mock television studio infrastructure built to allow broadcasters to **present, communicate, and provide feedback** on experimental data in a **naturalistic environment** (on-camera)
- Protected **social media accounts** allow study concerning how broadcasters communicate probabilistic information on **alternative platforms**

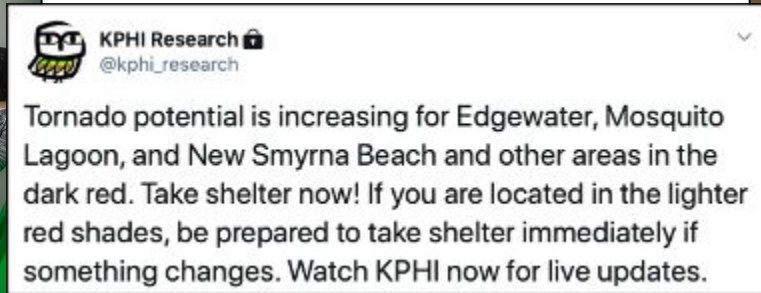



# Future Work with Core Partners

- **Expand experiment timeline** for broadcast meteorologists (hours and days ahead of the severe weather event)
- Research across the **entire continuum** to identify gaps and ensure products are telling a **cohesive story** across all time/space scales


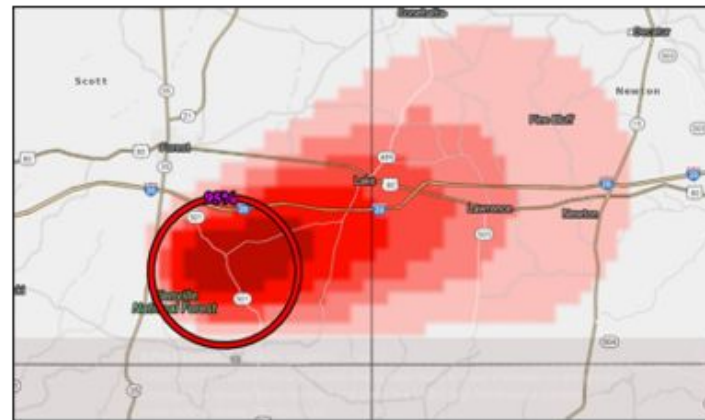
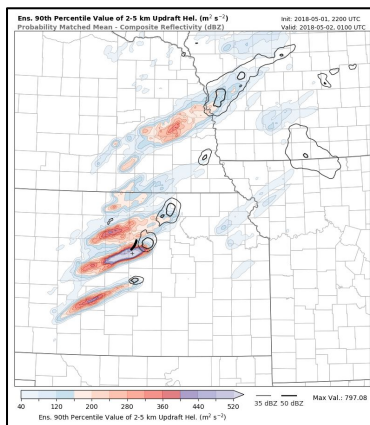
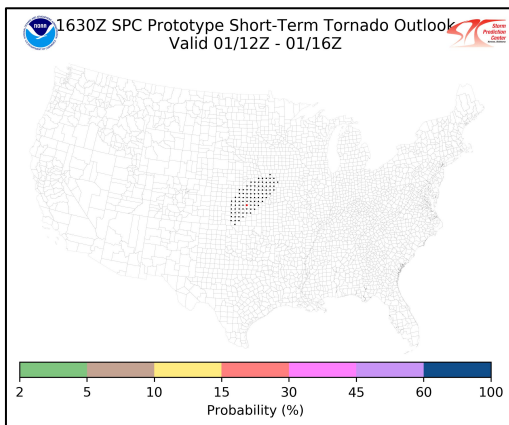




# Observation-based severe convective tools

## Satellite and Lightning Convective Tools and Research




Kristin Calhoun, PhD; NSSL Research Scientist; WRDD

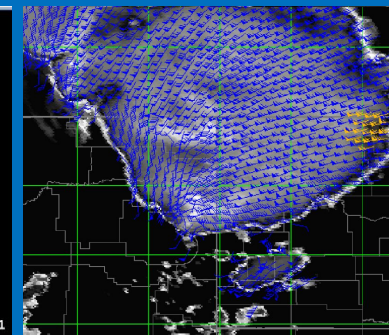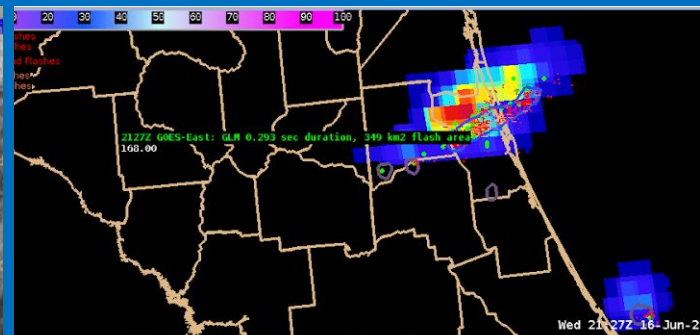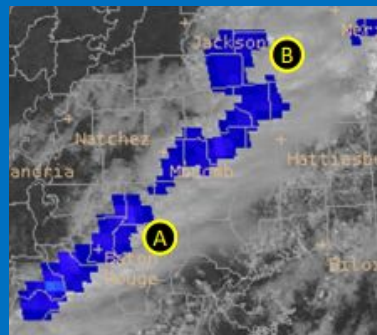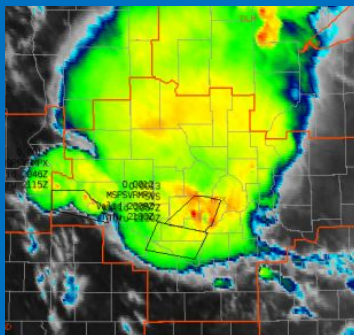



# Satellite, Lightning and Severe Weather

With GOES-R series of satellites, satellite data is now more relevant than ever for severe weather analysis and forecasting.

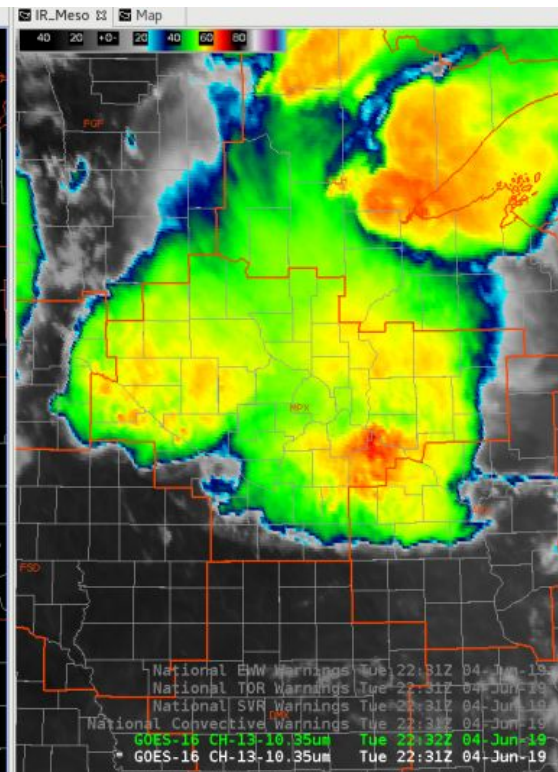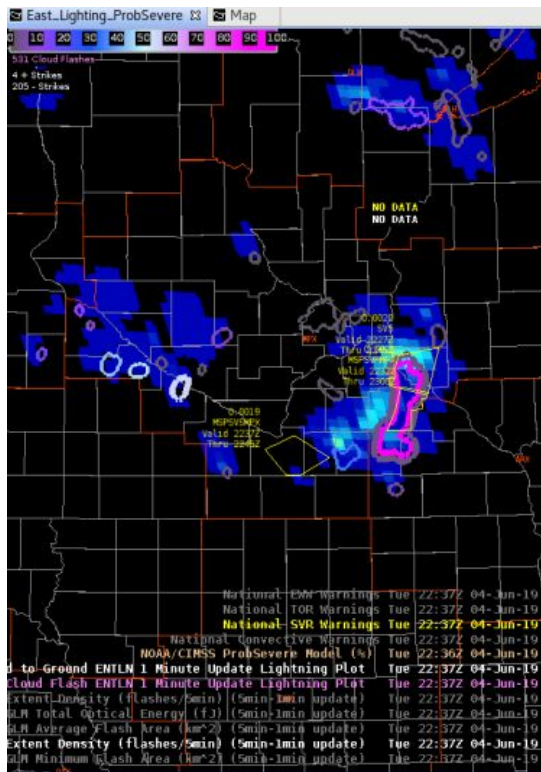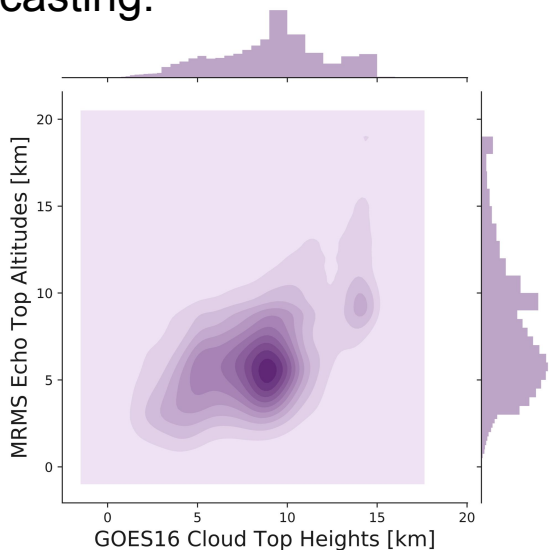





# Satellite Proving Ground collaboration in the HWT


- Forecasters define what products are needed, feedback on visualizations, and training requirements.
- New algorithms, such as the Geostationary Lightning Mapper (GLM) Minimum Flash Area and multi-instrument displays, developed due to HWT testing and collaboration.
- In the end we make an instrument such as the GLM operationally relevant.
- Scientists and developers better understand how these satellite data can be used within forecasting and warnings of severe and hazardous weather.





# Innovations with the Geostationary Lightning Mapper (GLM)

2020 NOAA Science Report Highlight  
Collaboration with NESDIS, NASA, and academic sectors

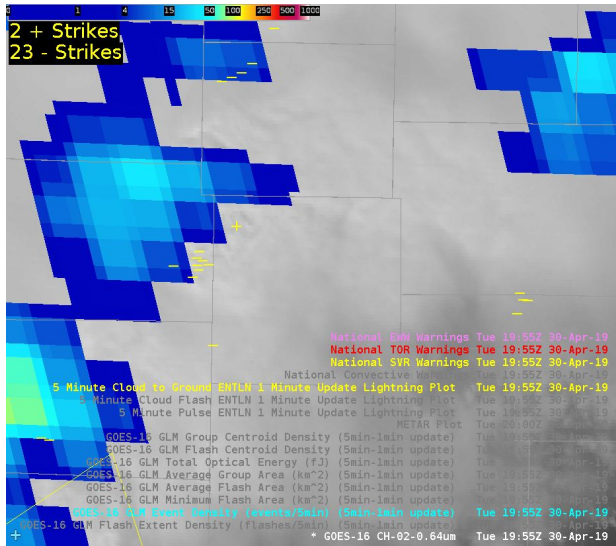


Following launch of the instrument in 2016, initial review in the HWT noted the GLM visualization of base data did not originally make use of full capabilities of the new instrument and lacked usability.

Entire product suite was redesigned to retain the quantitative physical measurements and spatial extent native to the GLM.

New visualizations show extent and density information, providing details on cyclic nature of storms.

*Left: The increase in lightning density signaling intensification of the storm's updraft.*



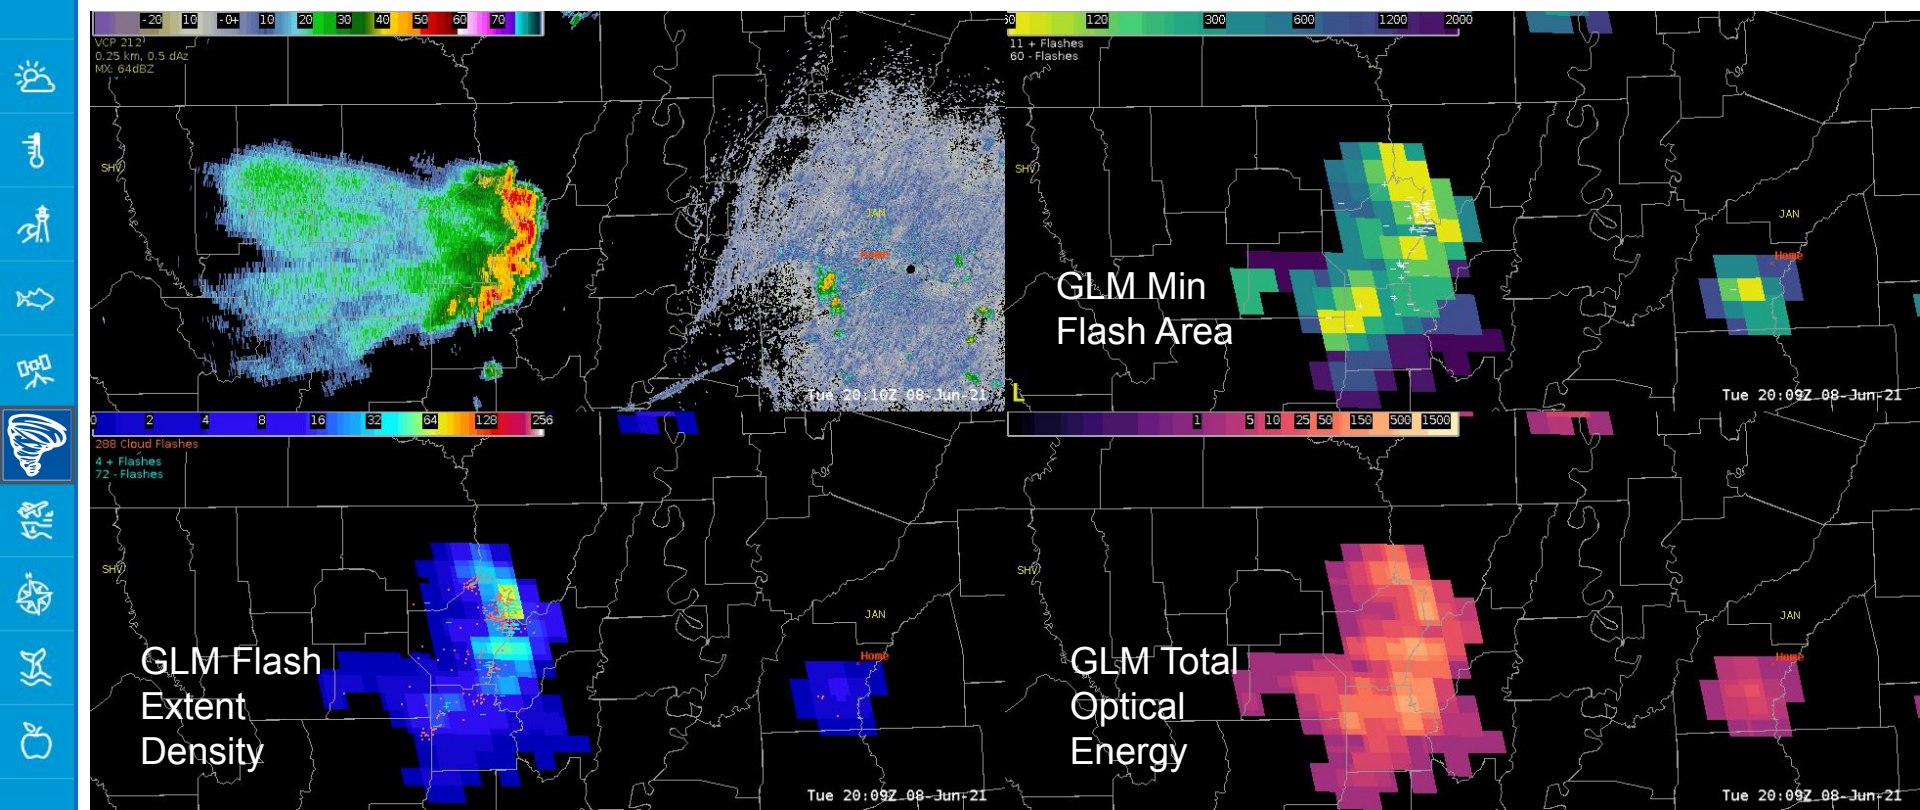

Northeast Louisiana (8 June 2021): Formation of trailing stratiform region and lightning begins to extend westward. Forecaster blog post: *“GLM can be helpful in time when you may have a DSS event and the main line has passed through, but lightning is still present in the trailing light rain. Pairing the ground networks with the GLM extent and area allows a forecaster to give DSS on the latest CG stroke within the large area.”*




# GLM Data Assimilation


3-h Forecast CREF from 00Z, 6 May 2020



GLM and GLM+Radar have higher success ratio than radar data alone. Below: hourly estimated rainfall from different DA methods:

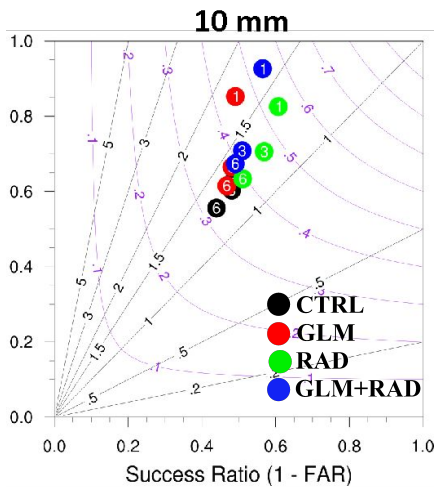


Example of positive impact on forecast of radar coverage and precipitation in southeastern North Carolina.

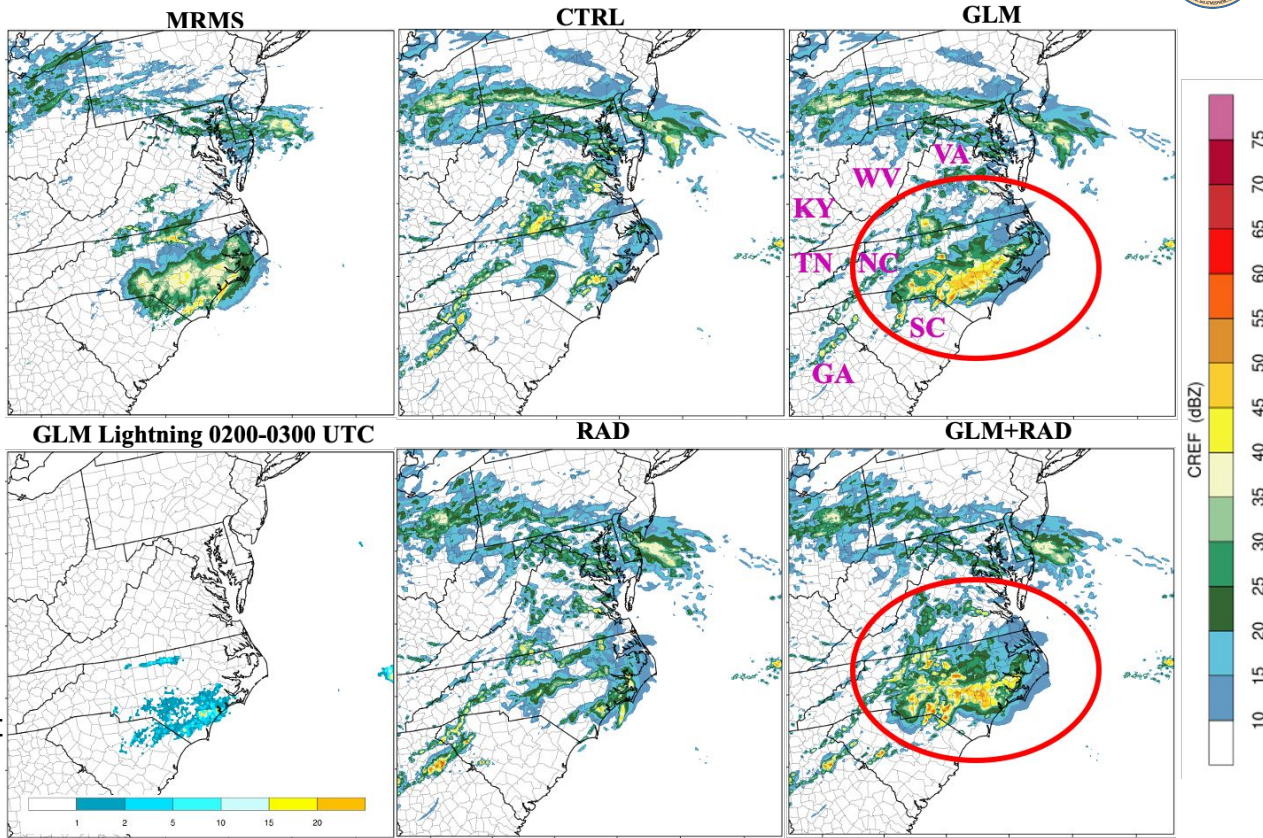

# Cloud top winds from optical flow

- Adds wind values in the inner cold cloud ring where legacy winds are lacking. Tested with live data at both the NHC and the 2021 HWT.
- Assimilating the combined winds into forecast models at EMC appear to improve storm track forecasts from the 2020 hurricane season.
- Based on these preliminary studies at EMC, real-time assimilation of the satellite winds into the next generation forecast model (HAFS) is being tested this tropical storm season (August-October 2021).

*Right: Cloud top winds from an optical flow technique for Hurricane Ida (2021). Bob Rabin.*

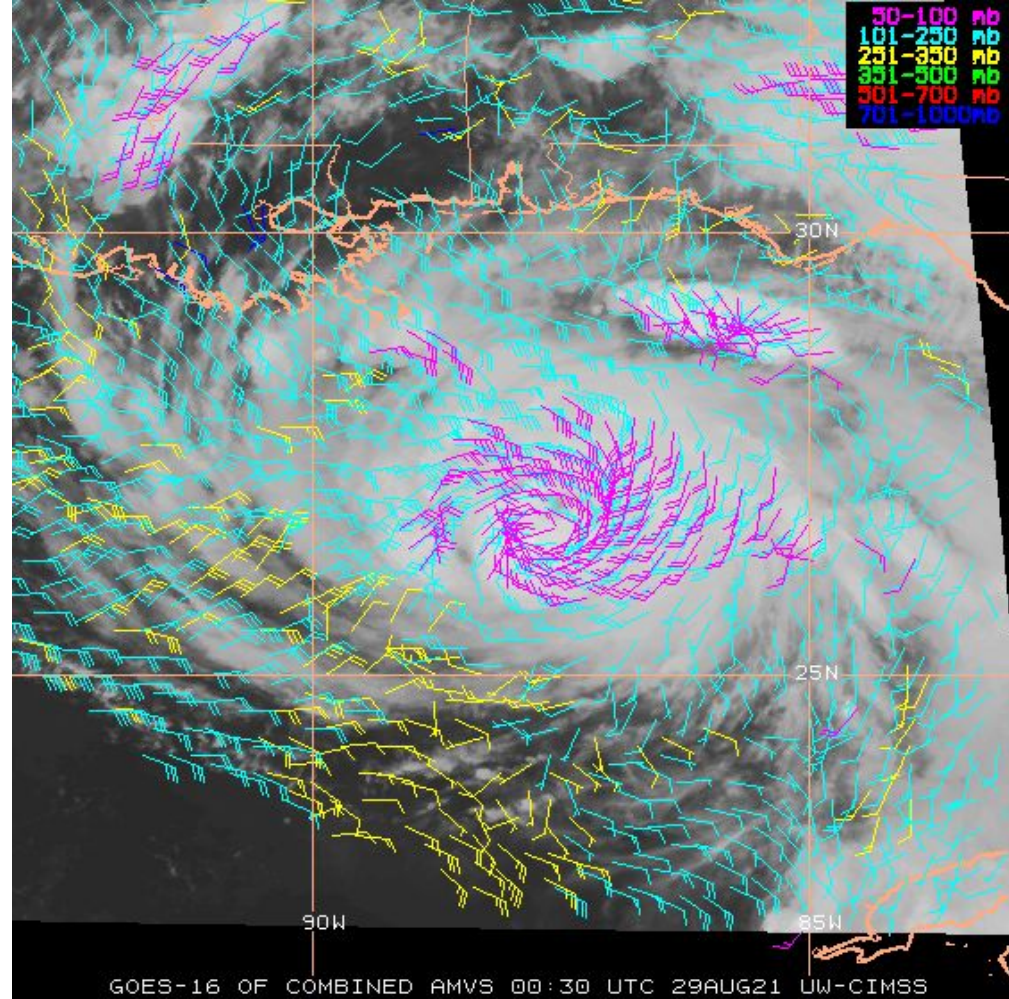






# Ongoing and Future work

- Continue bringing more ABI and GLM products into the MRMS operational suite.
- Work with partners (UW-CIMSS, NASA, Academic) to include satellite data and algorithms such optical winds and cloud-top divergence in machine learning development and data assimilation.
- Creation of overall lightning density (blending networks/lightning sensors)
- Stereo estimates of cloud heights using ABI and GLM imagery
- Provide input and feedback on GEO-XO requirements and recommendations

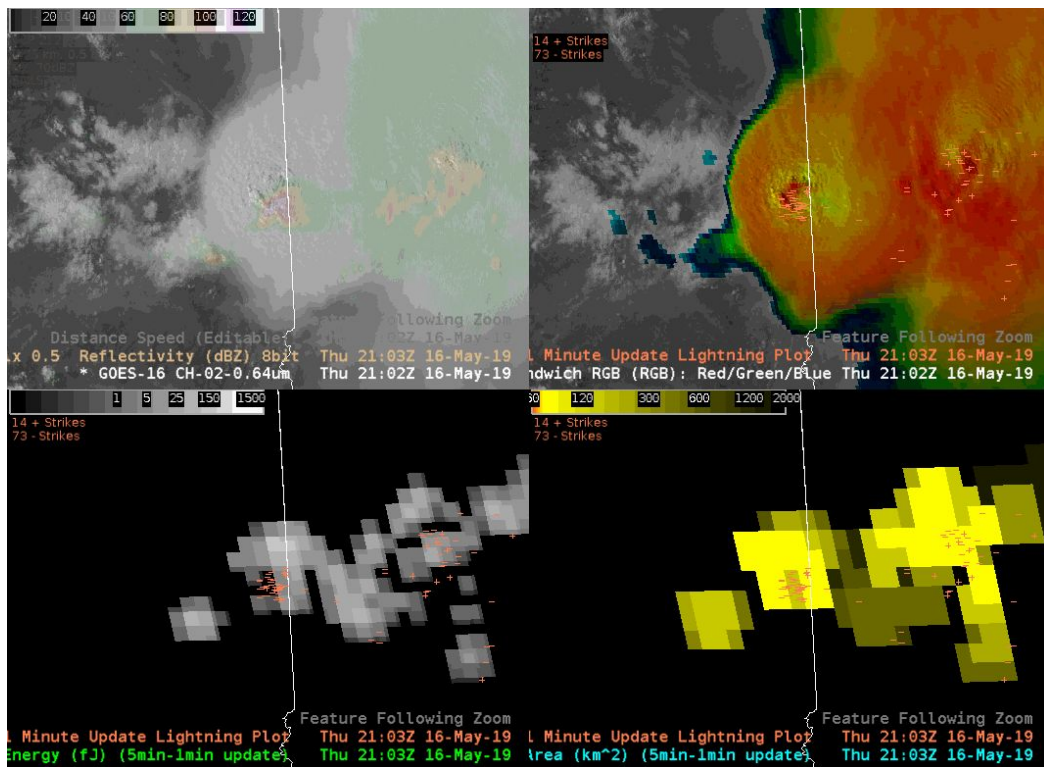





# Summarized Story to tell

## GLM specific:

- Lightning detections have historically been point based, typically represented by +, - , or
- The Geostationary Lightning Mapper is an ‘optical’ sensor -- We can create gridded imagery that may be animated like other weather satellite images, making it more suitable for diagnosing thunderstorm behavior.

Unfortunately, the GLM visualizations were initially created to match older sensor displays. Worked together with academic (TTU/UM), private (Lockheed-Martin) and government partners (NESDIS and NASA) to create new visualizations and products that more adequately represented the data including spatial extent information so critical for lightning safety and IDSS applications.

## ABI specific:

- Satellite data is now of the spatial and temporal resolution that it can be used in severe weather analysis and warnings.

GOESR risk reduction work prior to the launch of the new satellites

Ongoing work to begin using data in MRMS as well as create new products/algorithms for forecaster use:

Grams: Hydro and flash flooding

Calhoun: relating MRMS echo top heights with cloud top heights from ABI

Rabin: Parallax correction, optical wind flows

**Satellite data assimilation:**  
 •Don't want to repeat other sections (please tell me to remove, if necessary)

Fierro/Hu: GLM data assimilation

Thomas/ : ABI and WoF work





# Goal and Accomplishment(s)

HWT in coordination with the satellite proving ground.  
Pre-launch prep (risk reduction) and post-launch applications and new products /algorithms first evaluated.  
Experiments 2015-2019 and 2021.

GLM: created and evaluated new GLM products.  
Provided recommendations for the operational implementation based on HWT evaluation by forecasters. Top products, such as FED and Minimum Flash Area, set to move into NESDIS ground-system processing in 2022.








# Observation-based Severe Convective Tools

## Flooded Locations and Simulated Hydrographs Project - FLASH





Jonathan J. Gourley, Ph.D.; NSSL Research Hydrologist; WRDD

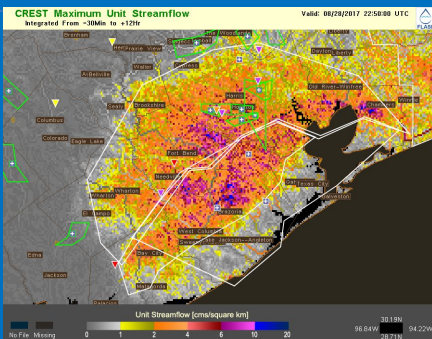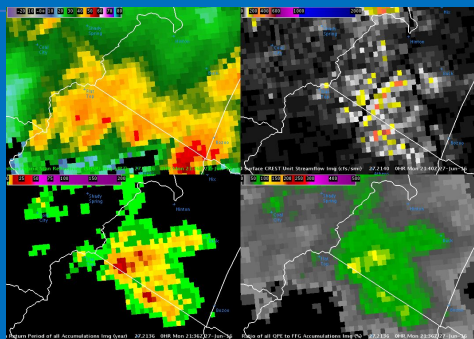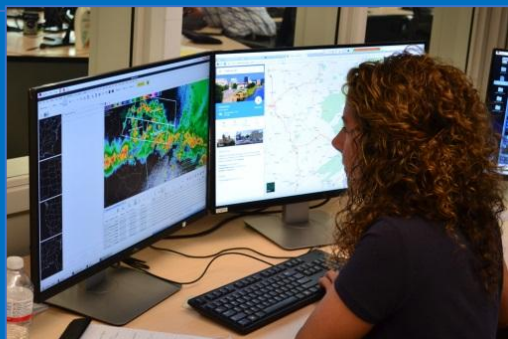




# Flooded Locations and Simulated Hydrographs Project - FLASH

- The FLASH project was launched in 2012; a result of the availability Multi-Radar Multi-Sensor precipitation estimates capturing precipitation at flash flood scale (1 km/2 min)
- FLASH was transitioned to the NWS/National Centers for Environmental Prediction in 2016
- FLASH changes the paradigm for operational flash flood prediction in the NWS and doubles the skill of the legacy system

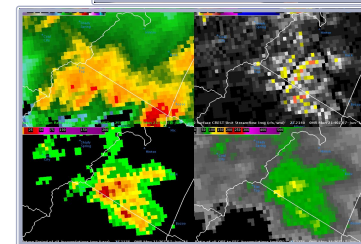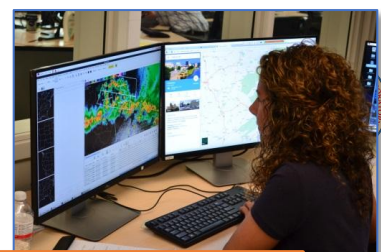

# Relevance (Why are we doing this)

- FLASH products, aided by training materials developed by the NWS/Warning Decision Training Division and guidance thresholds from forecasters' experience, have rapidly evolved the tools used for issuing flash flood warnings in the US and outer territories
- Doubling the accuracy of the legacy system and improving spatial resolution by 500 percent
- Providing up to six hours of forecast lead time
- Improving NWS forecasters' ability to identify rare, severe flash floods from minor ones

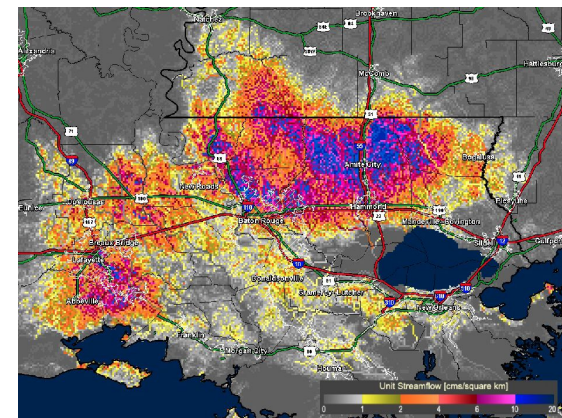

FLASH pinpointed areas in Louisiana impacted by severe flooding in August 2016. (Blue areas depict severe flash flooding)



Aerial image showing flooding in Louisiana. August 13, 2016. (Patrick Dennis/The Advocate)



# Goal and Accomplishment(s)

- Team published **20 articles** related to the FLASH project in the peer-reviewed journals from 2016-present
- Four in February 2017 issue of *BAMS*
- FLASH featured in September 2016 issue of *Discover* magazine
- 5 PhD's, 3 MS degrees, and several visiting international faculty and student interns, all doing research related to FLASH project



## THE FLASH PROJECT

Improving the Tools for Flash Flood Monitoring and Prediction across the United States

JONATHAN J. GOURLAY, ZACHARY L. FLANG, HUMBERTO VERGARA, PIERRE-EMMANUEL KIRSTETTER, ROBERT A. CLARK III, ELIZABETH ARDTLE, AMY ARTHUR, STEVEN MARTINWALT, GALATIA TERTI, JESSICA M. ERLINGS, YANG FONG, AND KENNETH W. HOWARD

FLASH advances the state of the science in operational flash flood monitoring and prediction in the U.S. National Weather Service.

**F**lash flooding remains a significant threat to those who live in the United States and beyond. From 1 October 2007 to 1 October 2015, the National Weather Service (NWS) reported a total of 26,826 flash flood events in the United States, yielding an average of 3,603 per year according to the Storm Events Database (available at [www.nws.gov/stormevents/rfp.jsp](http://www.nws.gov/stormevents/rfp.jsp)). Ten percent of these flash flood events resulted in combined crop and property damages exceeding \$100,000 (U.S. dollars) per event. A total of 278 individuals lost their lives due to flash floods in the United States during this 8-yr period. Fatalities resulting from floods and flash floods show no clear trend in recent decades. A brief point regarding faster-responding flash segregation impacts so in the literature. While for separating floods as necessary to divide the fering operational report including the NWS. In (NWS 2012), italic add of water in a "stream or flood level, beginning a event" Flash floods fall cal NWS Weather Forec

**AMERICAN METEOROLOGICAL SOCIETY**

### FLOODS

**1** It is one of the most serious and costly natural hazards. The majority of deaths between 1994 and 2013 were floods, and they inflicted nearly 2.5 billion people in some more modest but costly flooding. In the Americas, there are over half a billion people who live in flood-prone and coastal urbanized power basins.

**WHAT CAUSES THEM?** Flood events by heavy rain, strong winds or storm surges.

**ADVANCES:** Meteorologists can now forecast and track flash floods more accurately than ever before. New satellite and radar-based monitoring systems are being used to monitor the atmosphere's moisture content. The Storm Events Database is being used to monitor and track flash floods. The NWS has developed a new flash flood forecast tool that uses the latest in meteorological science to provide more accurate information and more lead time than traditional systems. This tool is being used by the NWS and other agencies to provide better information and more lead time to the public.

**THE CHALLENGE:** Flash flooding is a major cause of death and property loss in the United States. The NWS is working to improve its forecasting capabilities and provide better information and more lead time to the public. The NWS is also working to improve its public information and warning capabilities.

**WHAT YOU CAN DO:** If you live in a flood-prone area, you should have a flood escape plan and a kit. You should also know the local flood evacuation routes. If you are in a flood-prone area, you should have a flood escape plan and a kit. You should also know the local flood evacuation routes.

Tropical Storm Bill caused a flash flood in Falls Creek near Davis, Oklahoma, which swept over a road and inundated houses and businesses.

Flash flooding is a major cause of death and property loss in the United States. The NWS is working to improve its forecasting capabilities and provide better information and more lead time to the public. The NWS is also working to improve its public information and warning capabilities.



Flash flooding is a major cause of death and property loss in the United States. The NWS is working to improve its forecasting capabilities and provide better information and more lead time to the public. The NWS is also working to improve its public information and warning capabilities.

Flash flooding is a major cause of death and property loss in the United States. The NWS is working to improve its forecasting capabilities and provide better information and more lead time to the public. The NWS is also working to improve its public information and warning capabilities.



# Goal and Accomplishment(s)

- The Hydrometeorological Testbed Multi-Radar Multi-Sensor Hydro Experiment (**HMT-Hydro**) played a vital role in garnering feedback from NWS forecasters and serving as an effective training conduit
- Hosted 72 NWS forecasters over 5 summers (2014-2019) for 3-4 weeks
- Participants issued experimental Flash Flood Watches and Warnings based on the FLASH tools across the CONUS and evaluated them the following day
- Tested out precipitation forcings from the High-Resolution Rapid Refresh and Warn-on-Forecast system models to generate probabilistic FLASH products

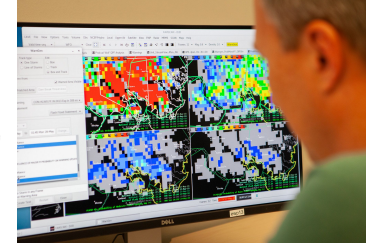

## THE HMT MULTI-RADAR MULTI-SENSOR HYDRO EXPERIMENT

STEVEN M. MARTINAITIS, JONATHAN J. GOURLEY, ZACHARY L. FLAMIG, ELIZABETH M. ARGYLE,  
ROBERT A. CLARK III, AMI ARTHUR, BRANDON R. SMITH, JESSICA M. ERLINGIS, SARAH PERFATER,  
AND BENJAMIN ALBRIGHT

NOAA/National Severe Storms Laboratory and National Weather Service forecasters evaluate new tools and techniques through real-time test bed operations for the improvement of flash flood detection and warning operations.



# Goal and Accomplishment(s)

MARCH 2021

CORRESPONDENCE

CORRESPONDENCE

Comments on "Flash Flood Verification: Pondering Precipitation Proxies"<sup>1</sup>

JONATHAN J. GOURLY<sup>1</sup> AND HUMBERTO VERGARA<sup>1,2\*</sup>

<sup>1</sup>NDAAR/National Severe Storms Laboratory, Norman, Oklahoma

<sup>2</sup>Cooperative Institute for Mesoscale Meteorological Studies, University of Oklahoma, Norman, Oklahoma

(Manuscript received 10 September 2020, in final form 2 December 2020)

Course Completion Information

Review Lesson


Complete the Quiz

Technical Problems?

**Introduction**

In order for NWS forecasters to receive credit for this course in the NWS Learning Center, you will need to take the following steps


- FLASH was transitioned to operations in the NWS in 2016 and has advanced the tools for flash flood forecasting in NWS Forecast Offices
- Training materials developed by the NWS/Warning Decision Training Division released in 2017
- Multi-Radar Multi-Sensor precipitation products were upgraded with dual-polarization variables in 2019, enabling more accurate estimates with extremes rainfall rates
- Guidance thresholds for FLASH were updated accordingly and reported in 2021

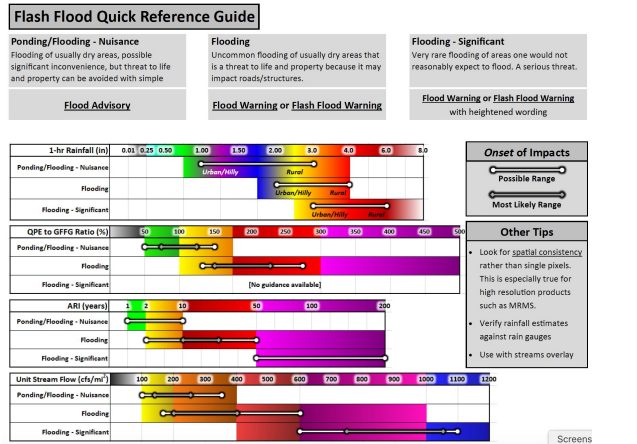

[23:30:22]  
 <nws-scott.overpeck@nwschat.weather.gov/NWSChatLive\_140.90.75.204\_133724>  
 Okay folks -update on flash flooding. Warning for Liberty and Chambers will drop as rain rates well below 1 inch an hour. FLASH max unit stream flow data showing decreasing stream flow so feel good threat is subsiding. There is still the areal flood warning out which will cover any ongoing flooding.

09/01 8:45 PM nwsbox-kristie.s... Hi All - just wanted to give an update on why we are getting ahead of things on these flash flood warnings. Given significant reports of flash flooding and extremely high values from our flash flood parameters, like CREST unit streamflow (3000+ units in some cases), hourly rain rates (an ASOS in NJ had an hourly rate of almost 3 inches) etc. coming out of PA/NJ/NY we have high confidence that flash flooding will occur across our area. Several areas of the mid atlantic are currently experiencing greater than 1 in 200 year (our scale stops at 200) flooding, which is quite a concerning figure given that this wall of water is pushing into our area. In an effort to alert the public before they wind down for bed and to really push messaging encouraging people to stay off roadways during the morning commute, we have tossed out flash flood warnings for several of our "flashy" counties, including Hampden and Worcester counties in MA and Hartford Co in CT. More flash flood warnings will be forthcoming. Stay safe everyone and please let us know if you have any questions! - Kristie




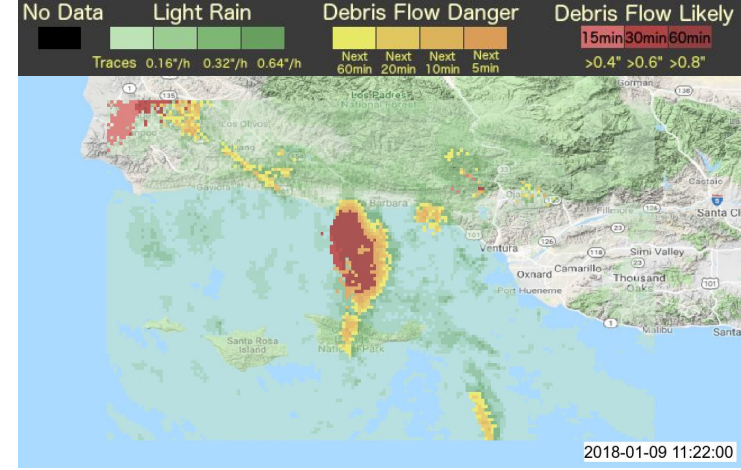

MRMS-based WildfireRain implementation outputs for the Jan. 9<sup>th</sup> 2018 event

# Future work (1-3 years)

- Improving guidance on burn scars by comparing rainfall to USGS debris flow thresholds and adjusting land cover and soil infiltration parameters in hydrologic models
- Increasing lead time using precipitation nowcasts and forecasts from Warn-on-Forecast System
- Accounting for spatial displacements in forecast precipitation objects
- Entire system being transitioned from deterministic to probabilistic to support new impact-based warning paradigm (JTTI award)

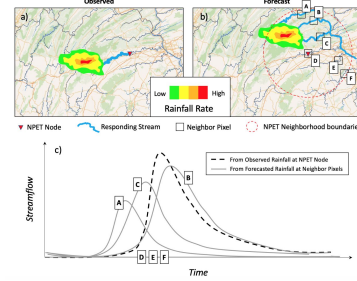

Flash Flood Damage Threat Tag	Explanation
"Base" (No Tag)	Use most of the time, when flash flood impact damage is possible.
CONSIDERABLE*	Use rarely, when there are indications flash flooding capable of unusual severity or impact is imminent or ongoing and urgent action is needed to protect lives and property.
CATASTROPHIC*+	Use exceedingly rarely, when a flash flood threat to life and catastrophic damage is occurring or is imminent, and floodwaters have risen or will rise to levels rarely if ever seen.

